

1.2030.3.0C / 1.2030.6.80

**Blower Unit 230 V / Air Tube Connection Set**



Blower Unit 1.2030.3.0C



Connection Set 1.2030.6.80

**Blower Unit 1.2030.3.0C**

**Characteristics**

- Compact design
- Very low noise
- 3-phase motor
- Single-phase connection

**Installation**

- At wall, at ceiling, or at bottom
- Motor axis can be horizontal or vertical (see graphic on the next page)

**Dimensions**

Flange size: Do80  
Housing: see table

**Accessories**

- Air Tube Connection Set 1.2030.6.80
- Wall mounting plate 1.2331.0.02

**Air Tube Connection Set 1.2030.6.80**

**For**

- Connecting the blower unit 1.2030.3.0C to the system

**Characteristics**


- Vibration absorbing rubber sleeves Do63
- Adaptors from 80 to 110 mm

**Dimensions**

Tube: for tube dimensions up to Do110  
Length: 150 mm

We reserve the right of changes!

Art #	f [Hz]	Voltage	Power [kW]	max P [kPas]	Vol [l / min]	height [mm]	width [mm]	depth [mm]	weight [kg]	dB (A)
1.2030.3.0C	50	200 – 230	0,8	15	2400	303	266	262	17	69
	60	200 – 230	0,9	16	3000	303	266	262	17	69

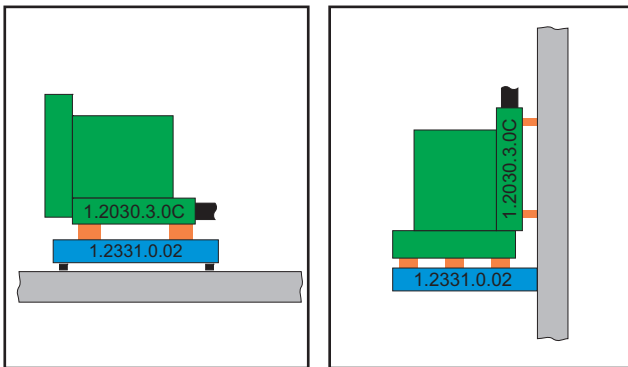

Installation Options

tube Do	length [m]	pay load [kg]	2030			
			freq [Hz]	speed [m/s]	freq [Hz]	speed [m/s]
110	200	1	50	3,9	60	4,7
110	200	2	50	3,6	60	4,3
110	400	2	50	3,0	60	3,6
110	500	3	50	2,5	60	3,0

Typical Application Cases of Product 2030