


1.1036.0.0C

## Central Controller H36C

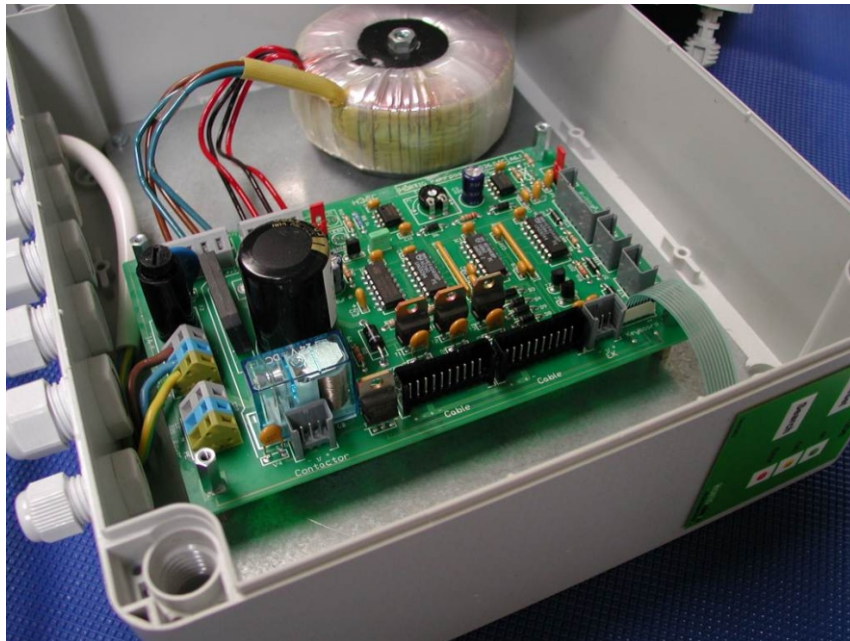

### For

- Controlling a H36 system:
  - Carrier order
  - Blower
  - DC power supply

### Characteristics

- Controls up to 20 stations (cashiers) at a distance of up to 150 m
- The internal power supply is sufficient for 500 m cable
- Very high sending frequency

### Integrated

- Control unit
- Power supply
- Timer module 2 – 270 seconds as total transport time control
- After time out of the timer module two different reactions can be chosen:
  - System resets automatically and waits for next job
  - System shutdown needs to be reset manually
- 230 V output for blower
- 24 V output for interface-contactor
- Membrane keyboard with:
  - Three LEDs: power, busy, error
  - Two buttons: blower, reset

- One Power cable with SCHUKO plug
- One fuse for power input
- Short circuit protection for all outputs

### Input voltage

110 or 240 VAC

### Housing

Protection class: Ip66

Dimensions: 270 mm (h) × 290 mm (w) × 170 mm (d)

Weight: 2.3 kg

### Option

- 110 VAC version with US-plug
- Transport counter with reset button (1.1036.0.ZC)

### Accessories

- Extension of the control cable length with remote control keyboard (1.1036.0.RC)

We reserve the right of changes!