


1.0396.T.0F

## Diverter 3-Way Jumbo

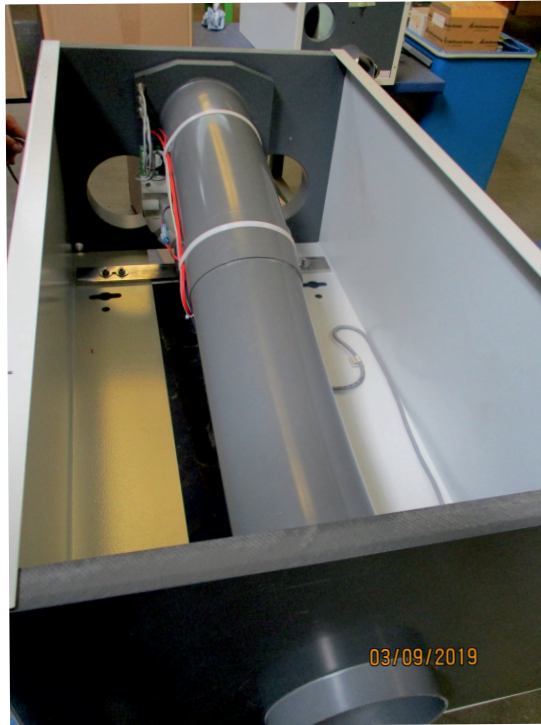

*Diverter 1.0396.T.0F*

### Characteristics

- Can be used as 2- or 3-way diverter
- S-bend (swivel tube) construction
- Hall position sensor controlled safe snap of the swivel tube into correct positions
- All functions can be checked directly at the diverter
- Absolutely suction and pressure tight
- Suitable for carriers up to 420 mm and 20 kg weight
- MTBF 8 years

### Installation/Service

- Installation in any direction
- Easy service when installed in ceiling
- Aligns perfectly within minutes during reassembly, due to star connection positioning system

### Technical properties

Material: Sheet-steel case, plastic-covered, with PVC and ABS parts inside

Colour: Powder coated, white-grey, appr. RAL 7035

Tube: Do160

Housing:

ca. 980 mm (h) × 530 mm (w) × 397 mm (d)

Weight: ca. 47 kg

### Delivery Scope

- Including AW control unit

**We reserve the right of changes!**