
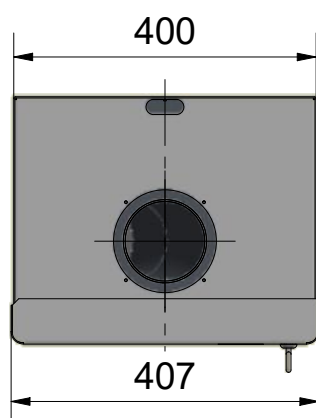
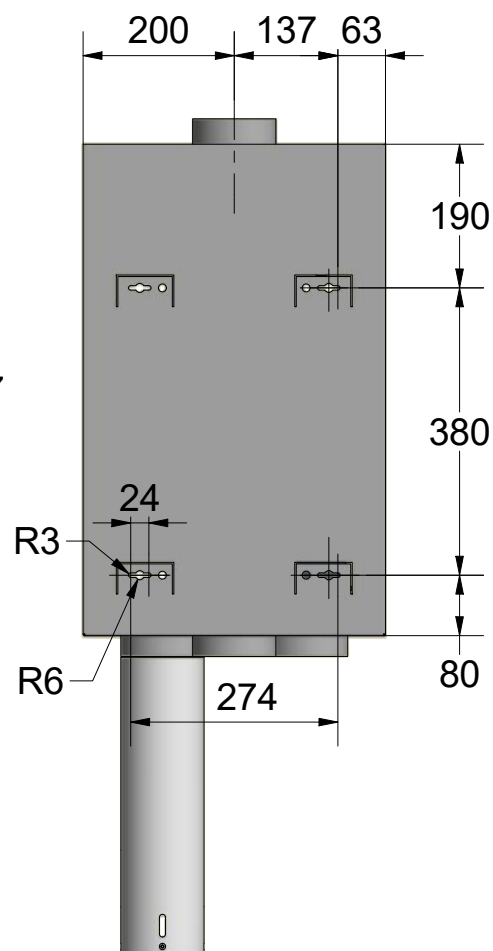
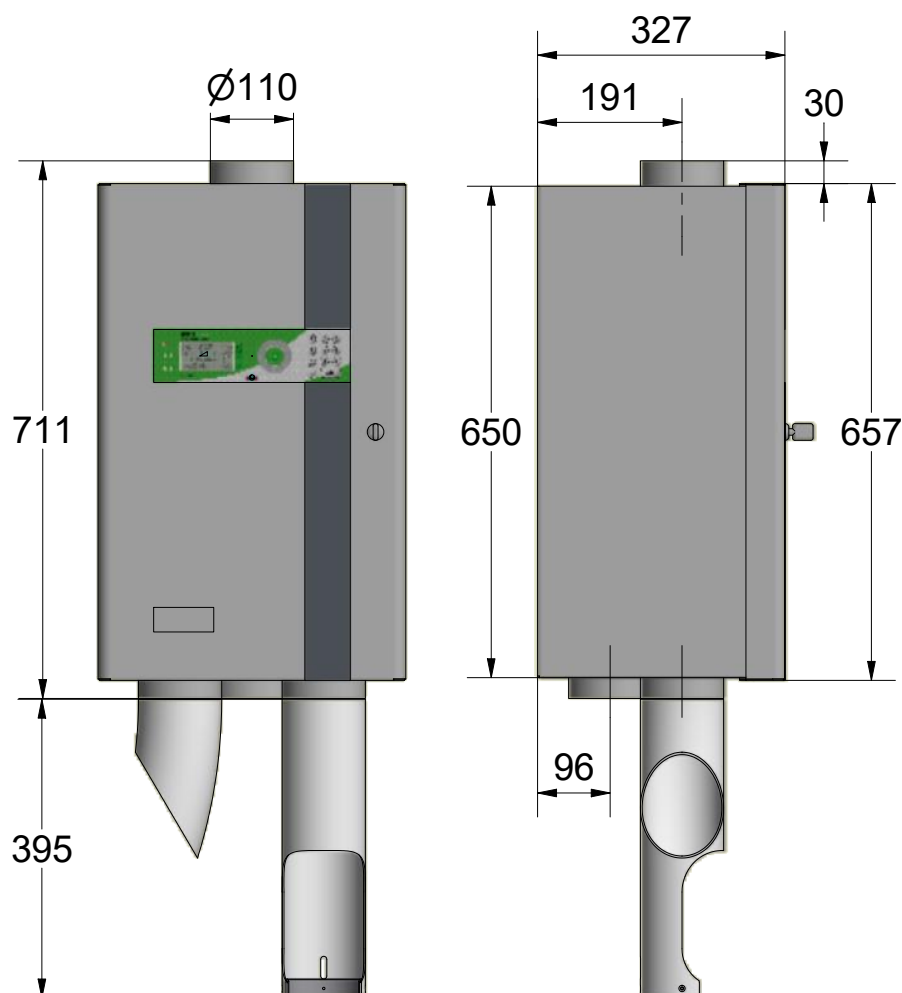


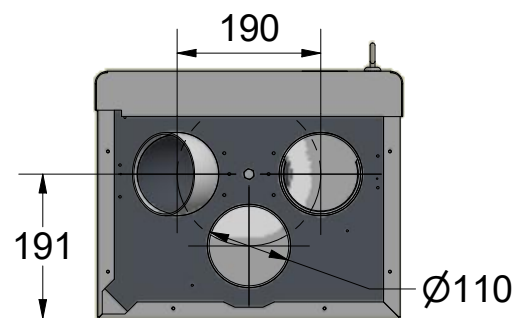

In the interest of continuous improvement and upgrade of our products Hörtig reserves the right to change the technical specifications at any time, without prior notice.

The examples given
(for reference only)
apply to a concrete wall

(2x)Ø8

Drilling pattern: rack

E.g. nylon dowel Ø8mm


Pan head chipboard screw 5mm

Ø8

Drilling pattern: station

E.g. nylon dowel Ø8mm



Pan head chipboard screw 5mm

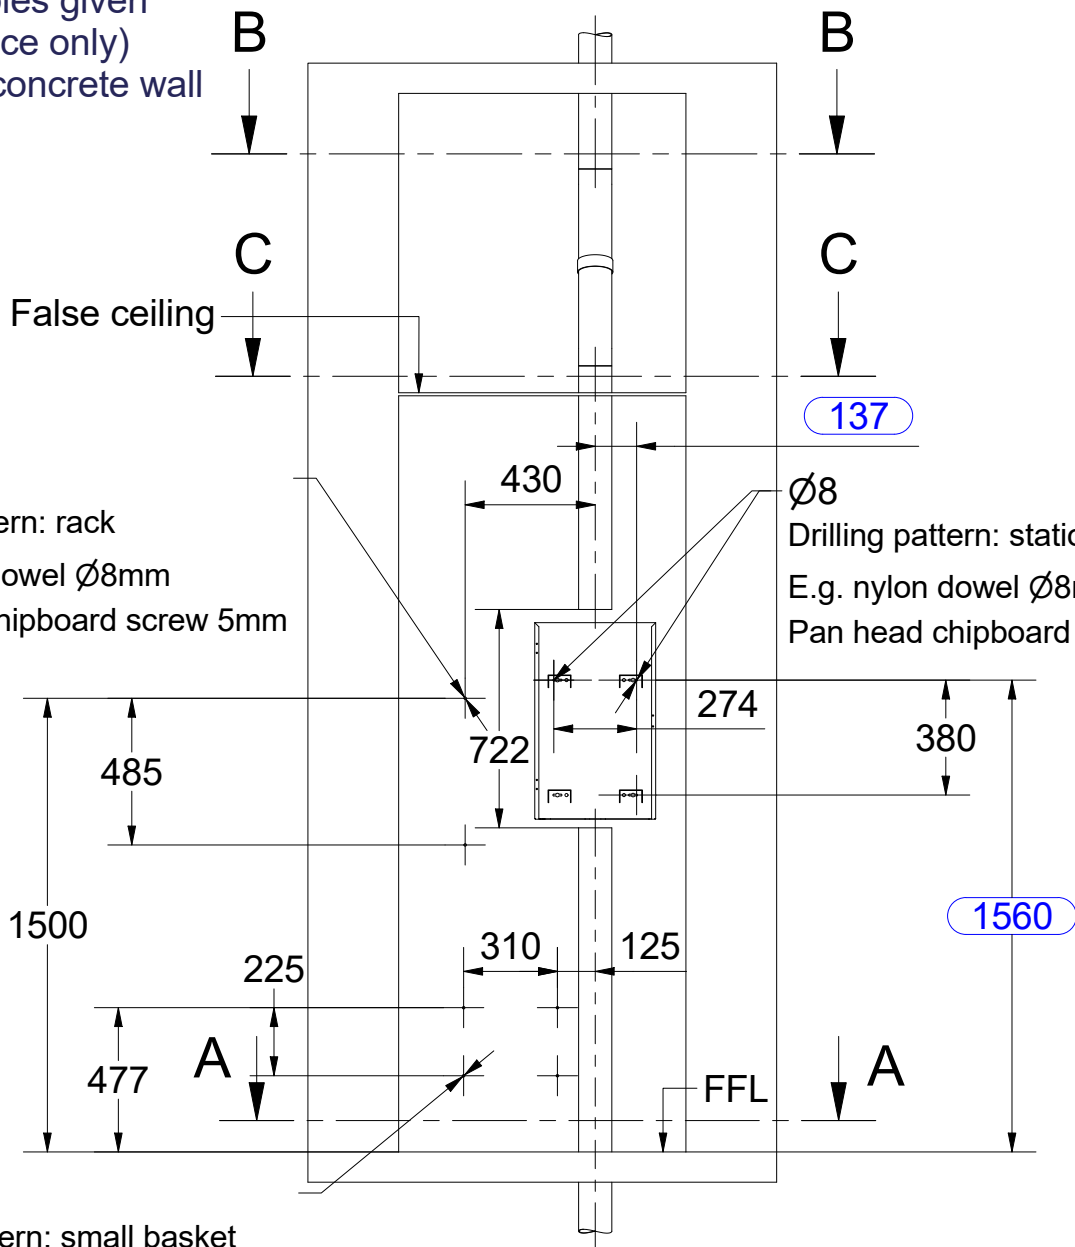


A-A (1 : 25)



B-B (1 : 25)

C-C (1 : 25)

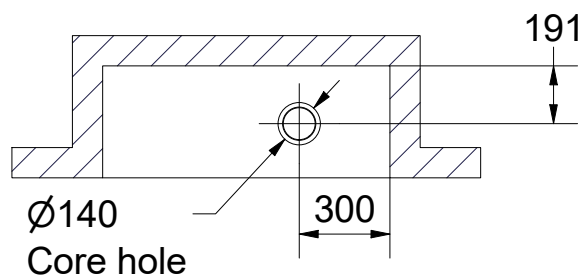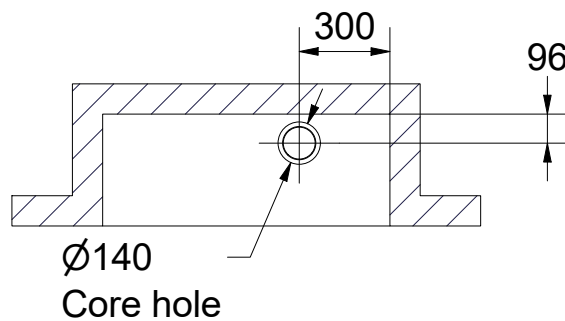

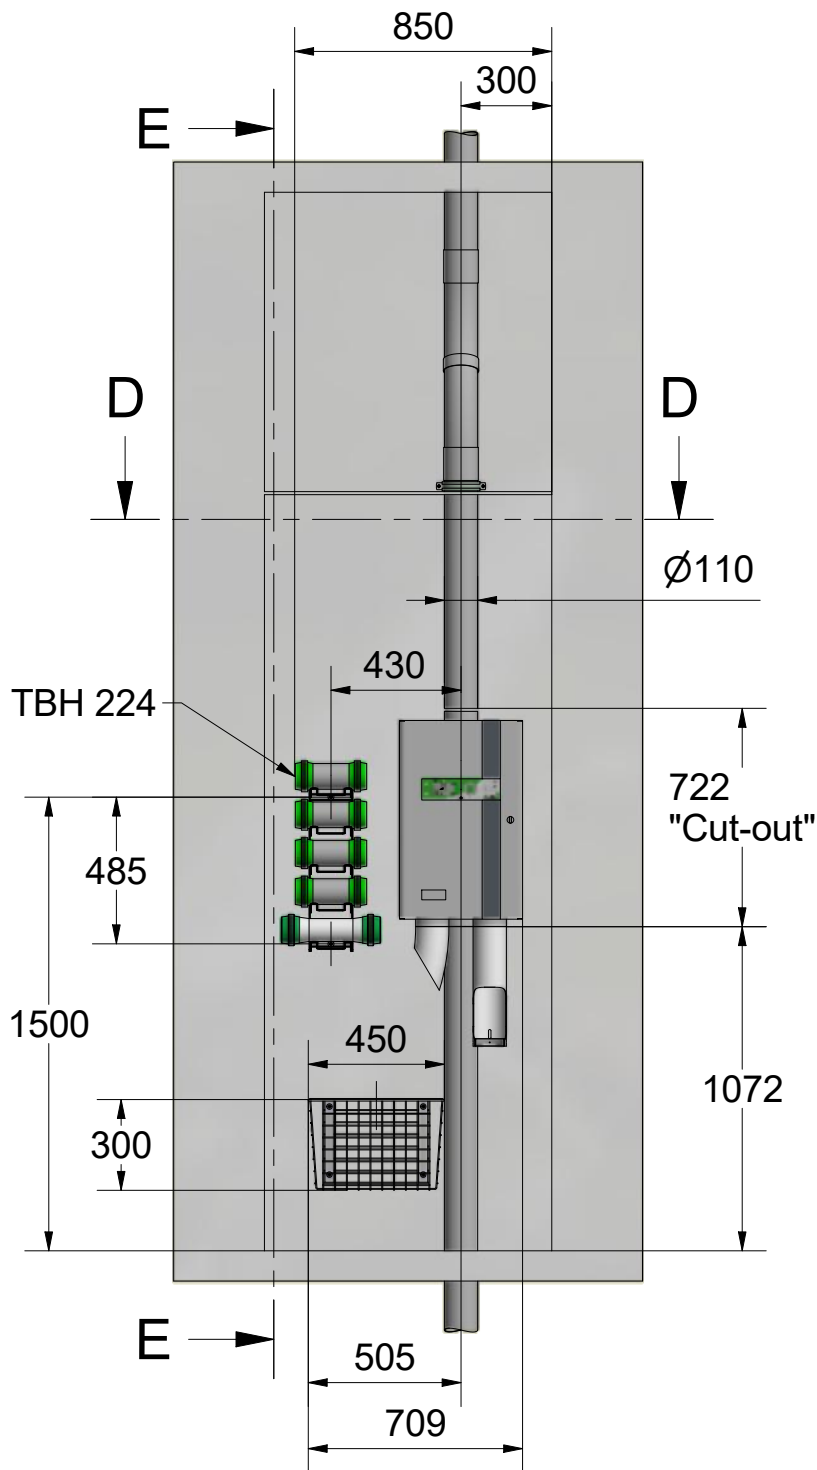



E-E (1 : 25)

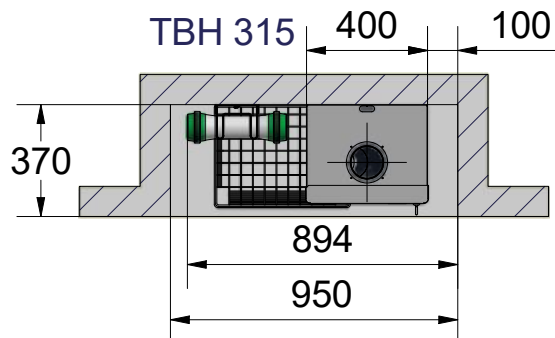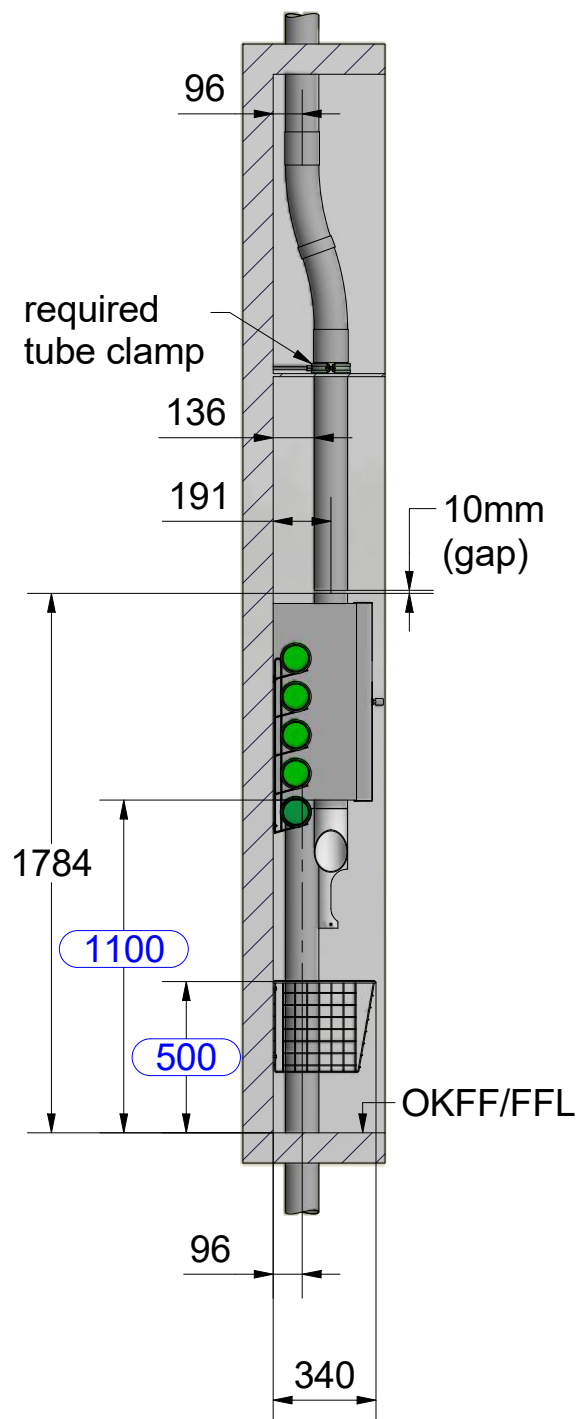


D-D (1 : 25)

Do not install any tube clamp under the station/above the basket area
It may collide with the carriers



G-G (1 : 25)

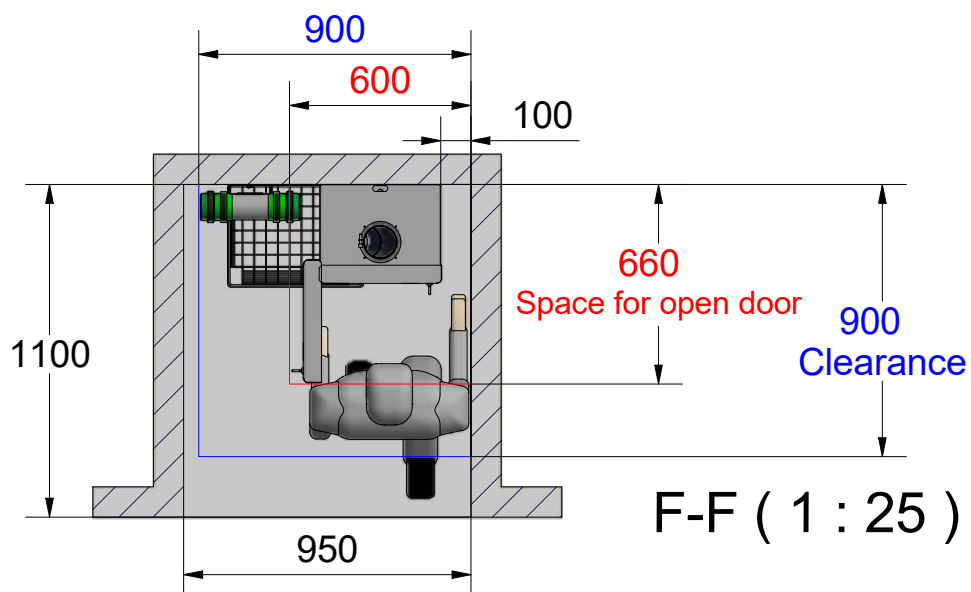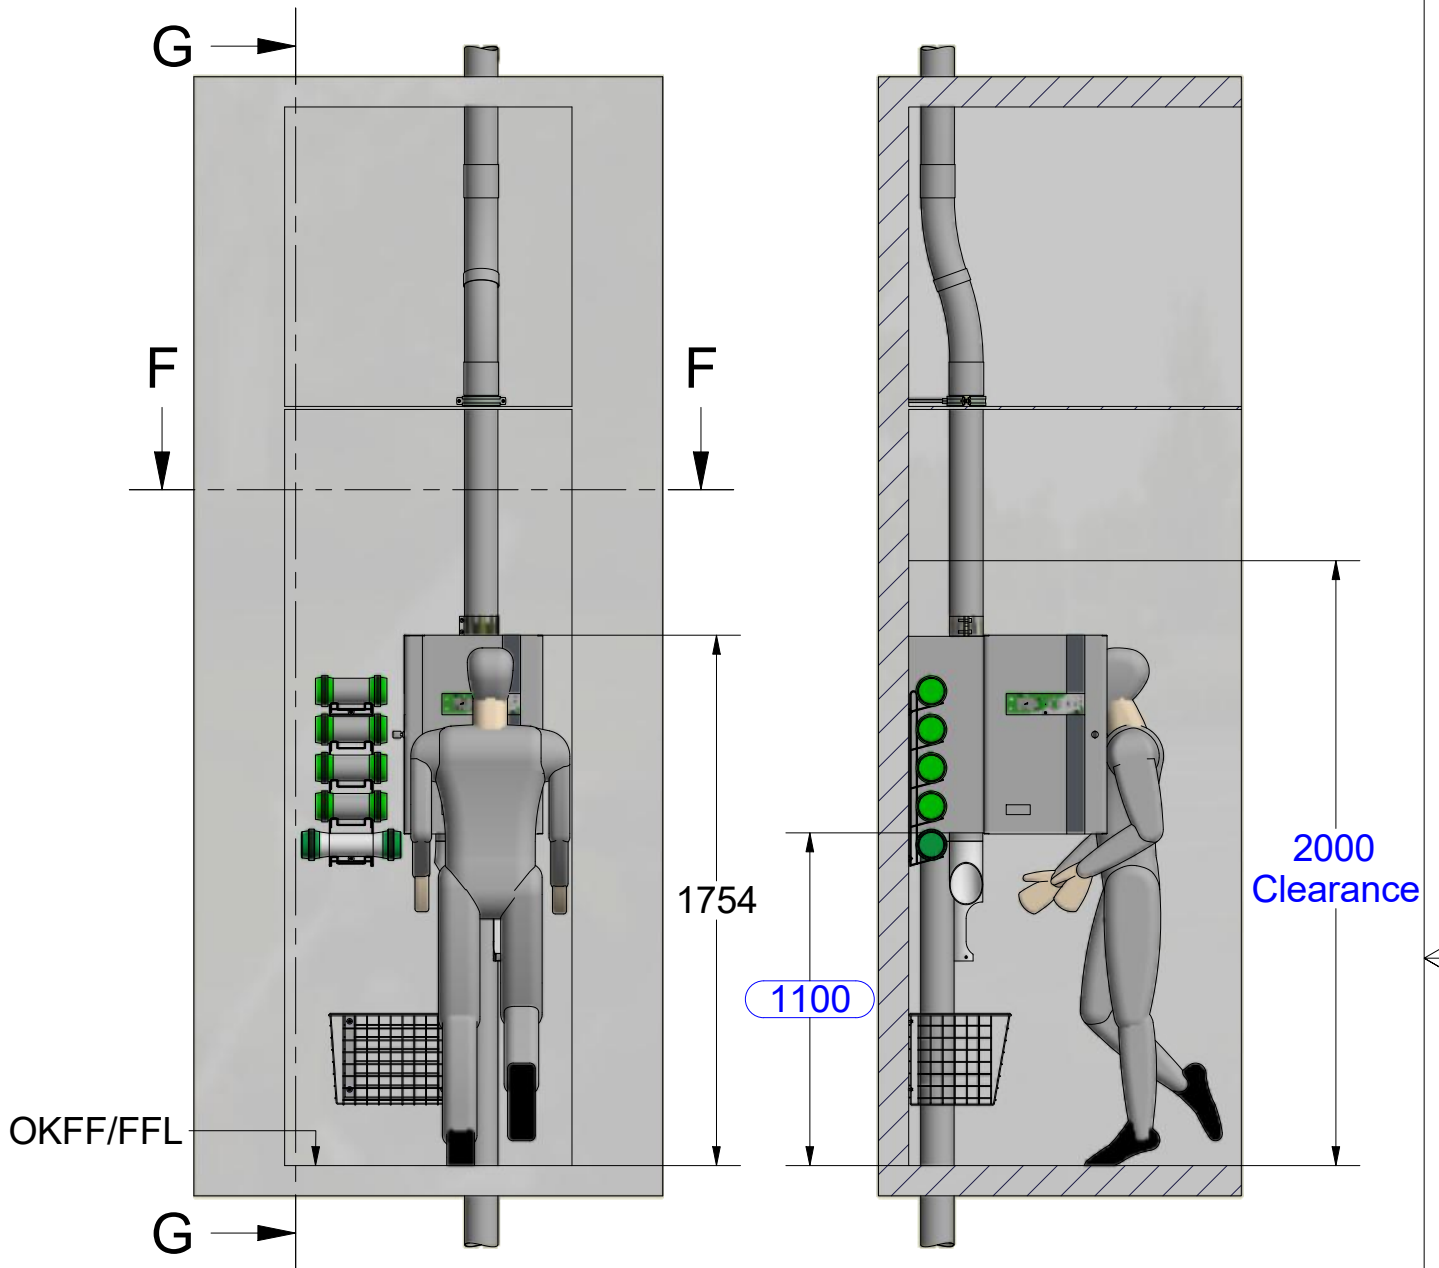


F-F (1 : 25)

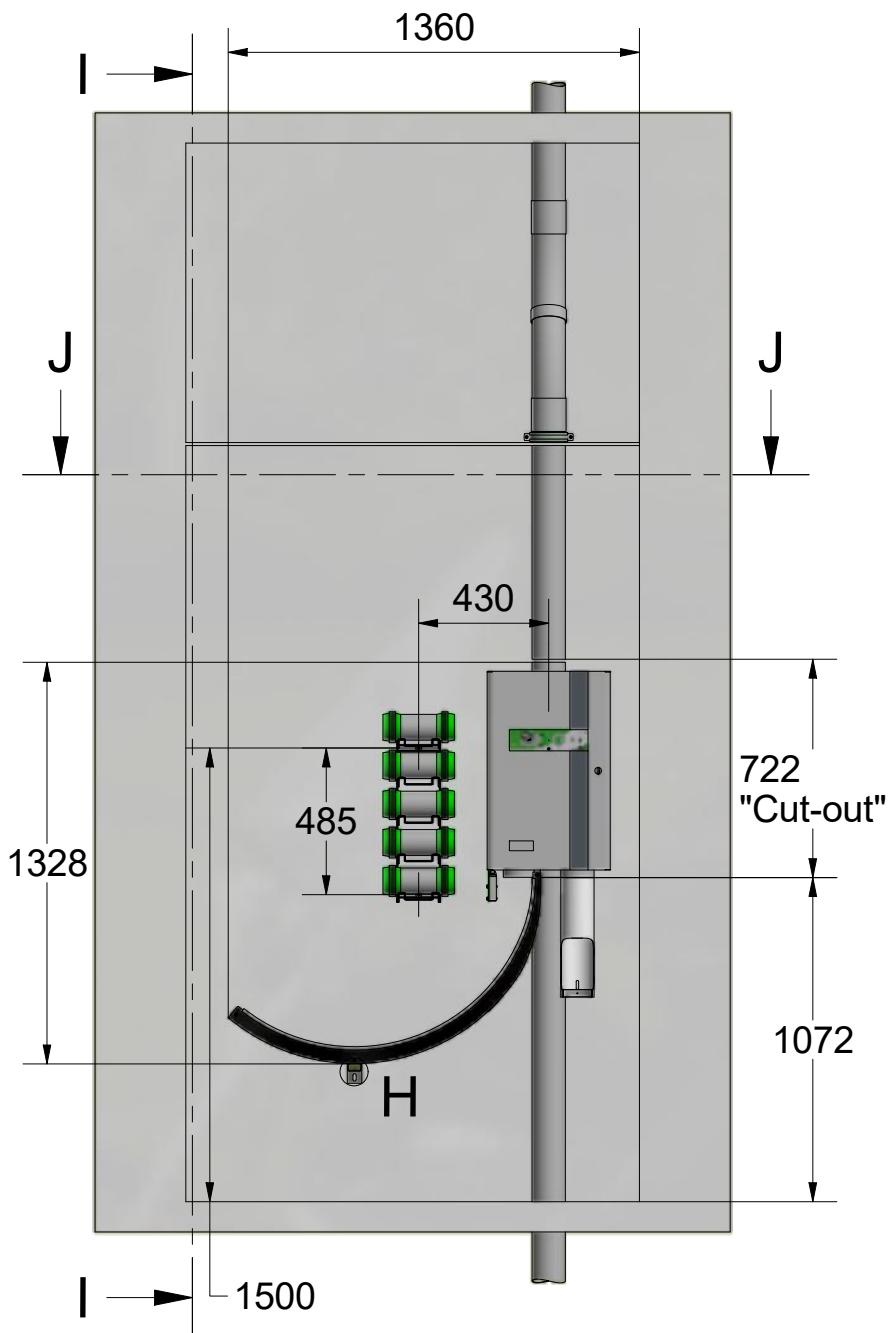

I-I (1 : 25)


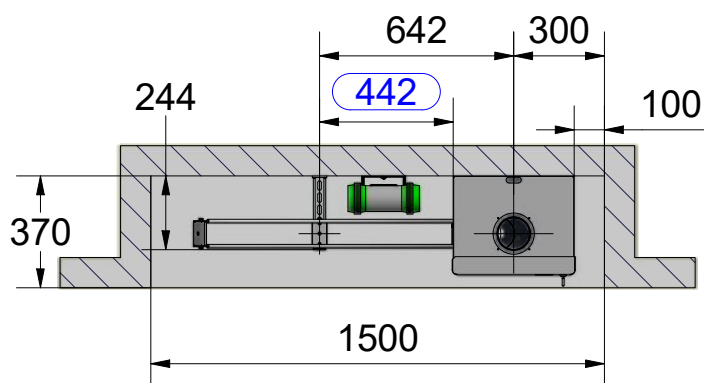
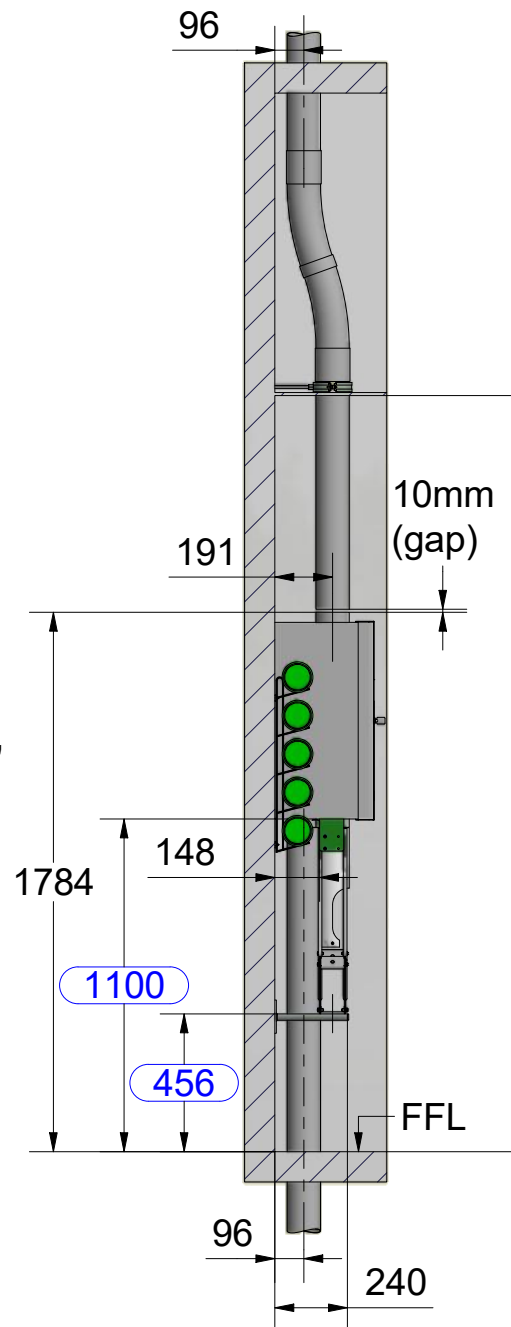



J-J (1 : 25)



OKFF/FFL

H (1 : 3)

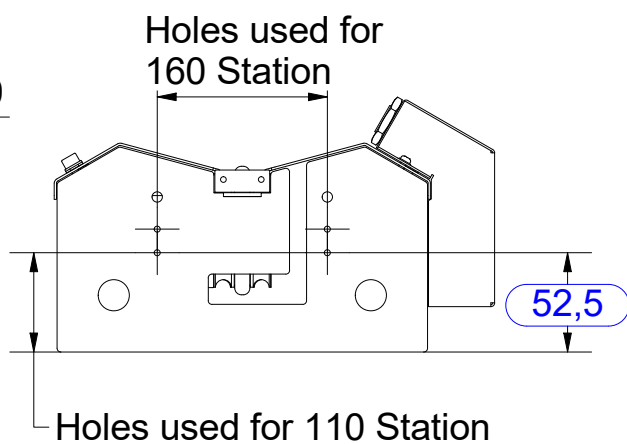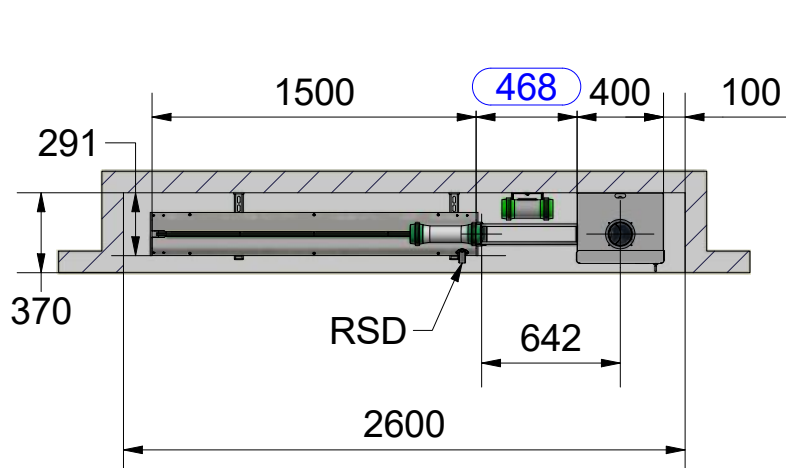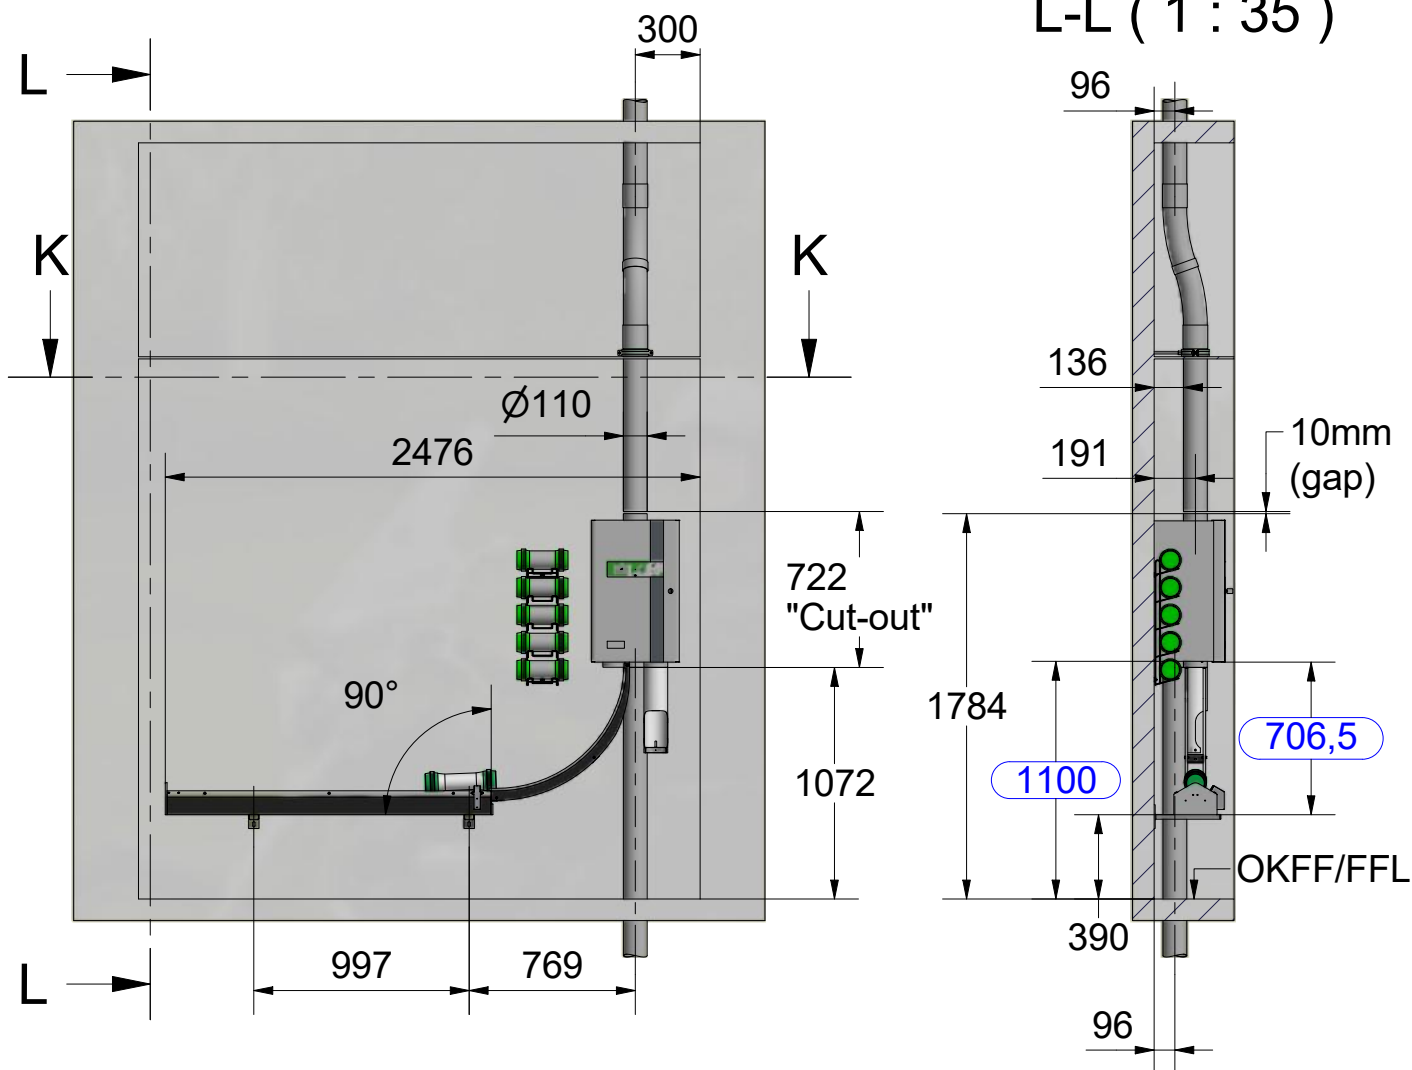

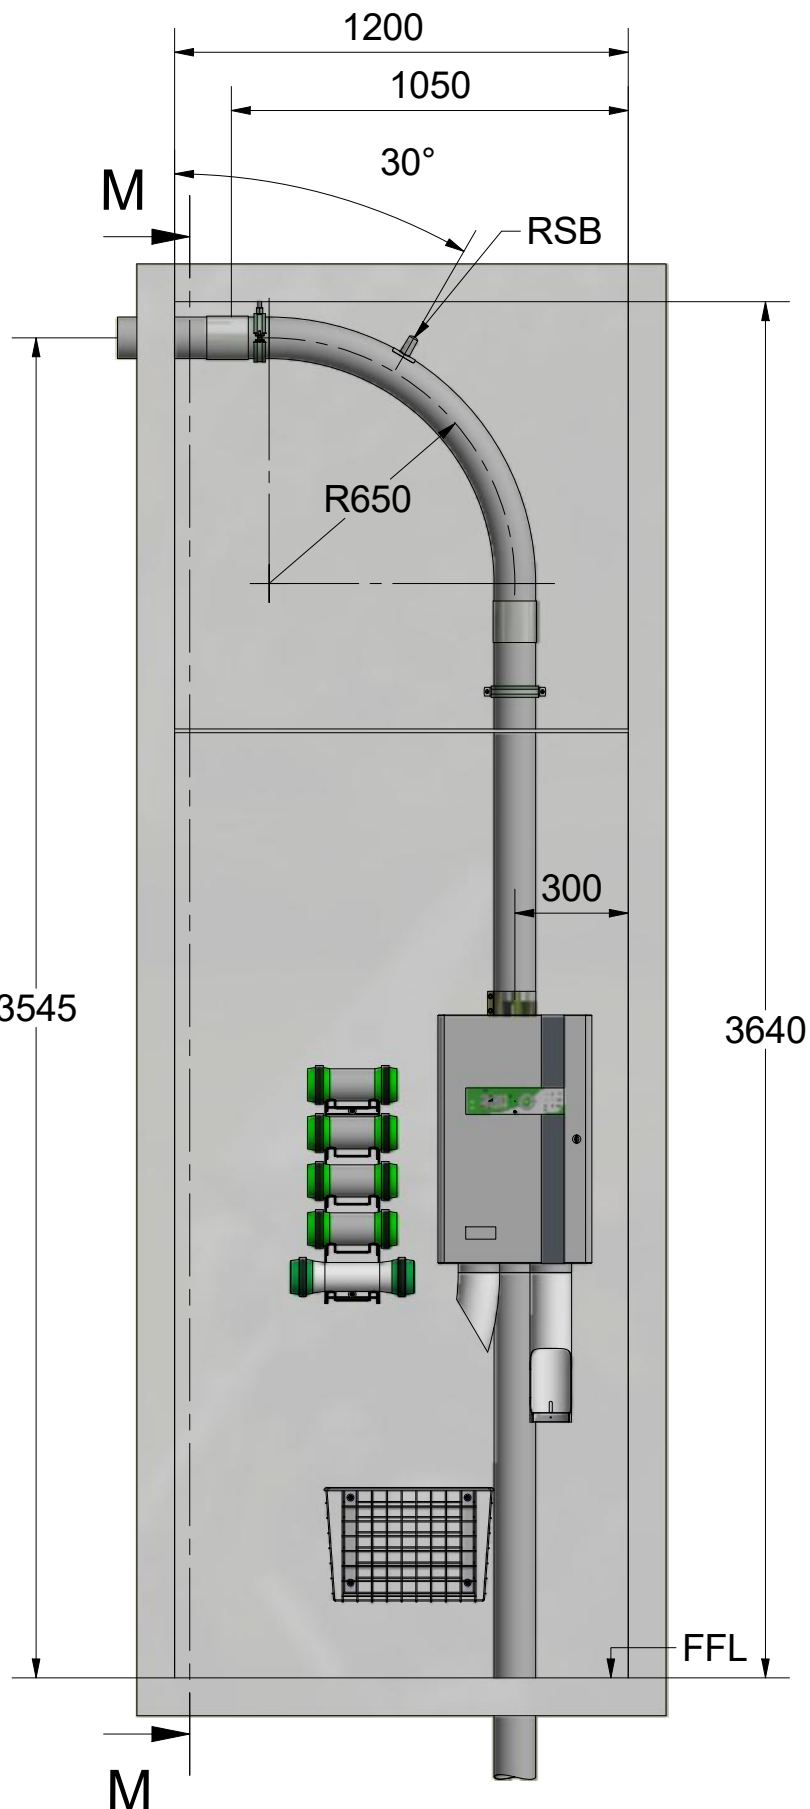

M-M (1 : 20)

