



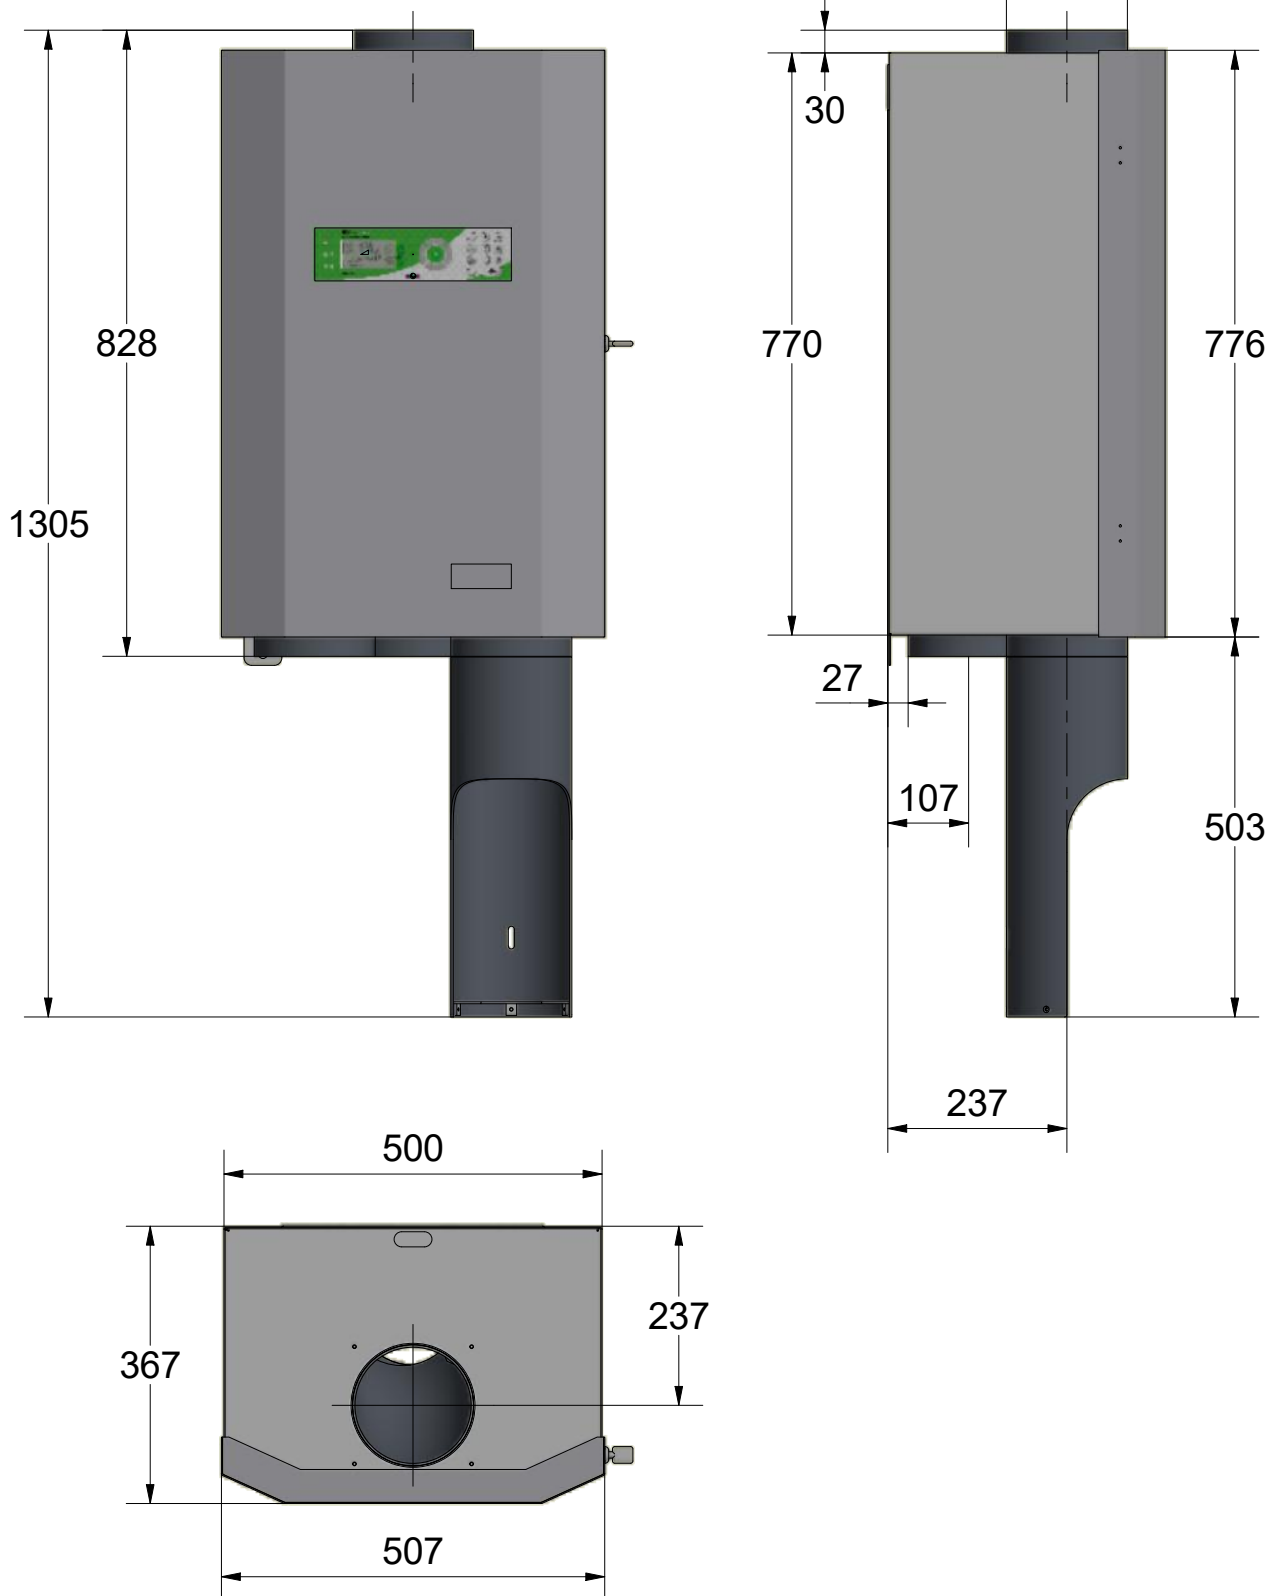


In the interest of continuous improvement and upgrade of our products Hörtig reserves the right to change the technical specifications at any time, without prior notice.


The examples given (for reference only)
apply to a concrete wall

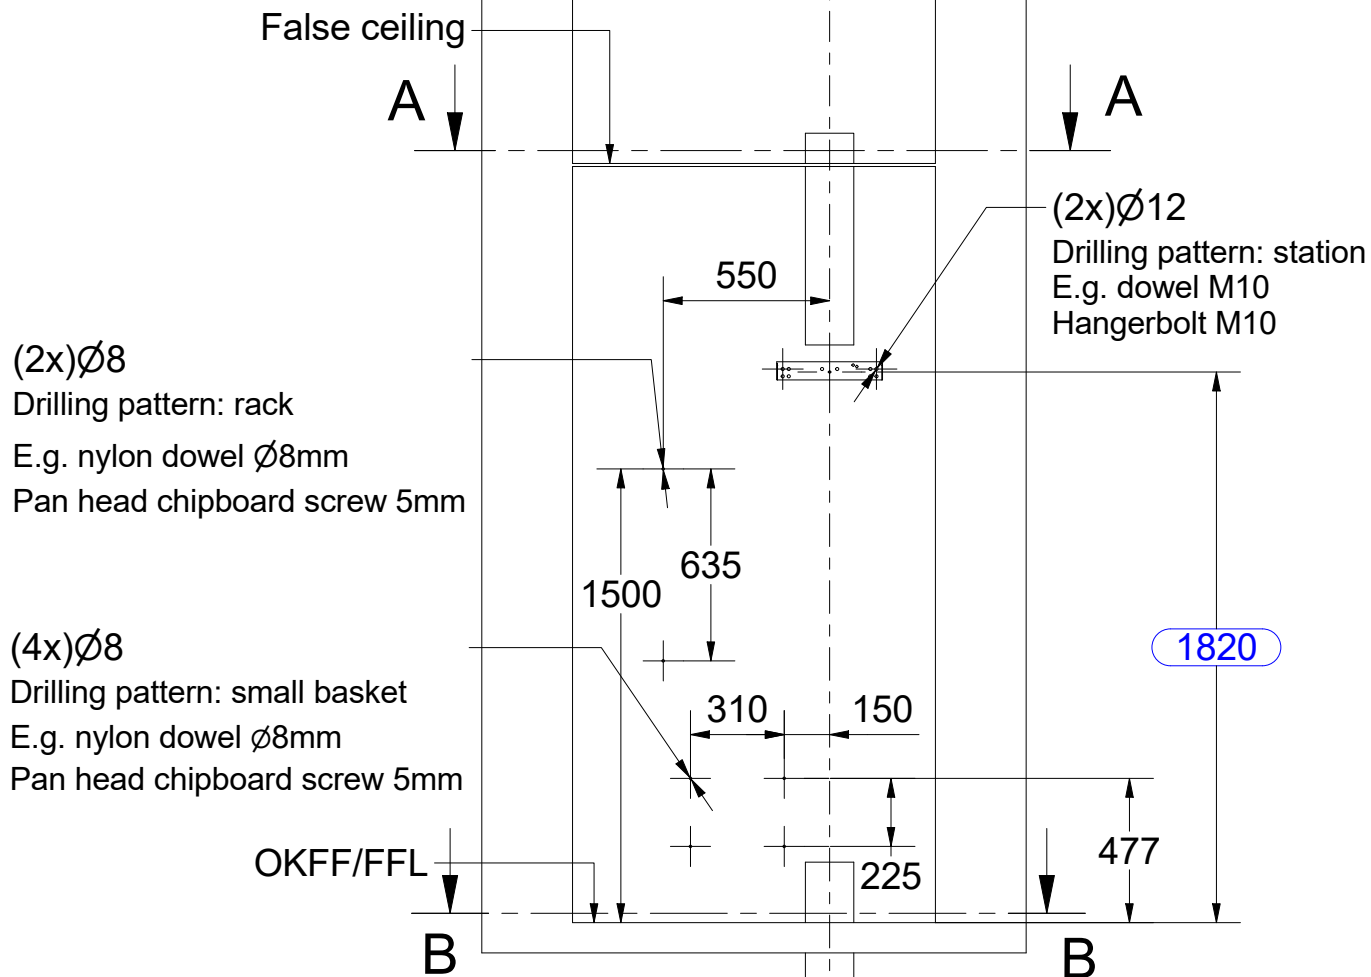

A-A (1 : 25)

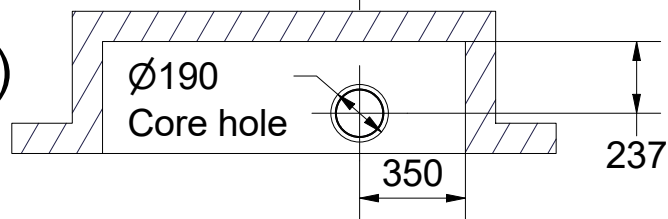


B-B (1 : 25)

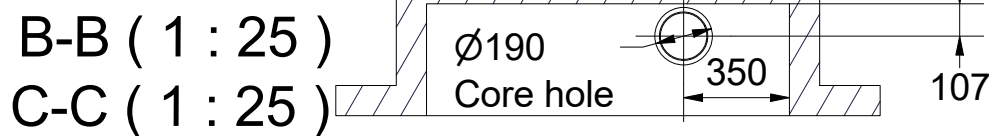


C-C (1 : 25)



(1 : 5)

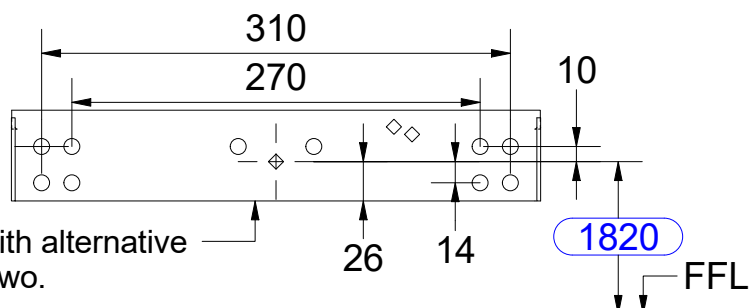

1.0461.T.45 Wall bracket with alternative
fixation holes: use at least two.


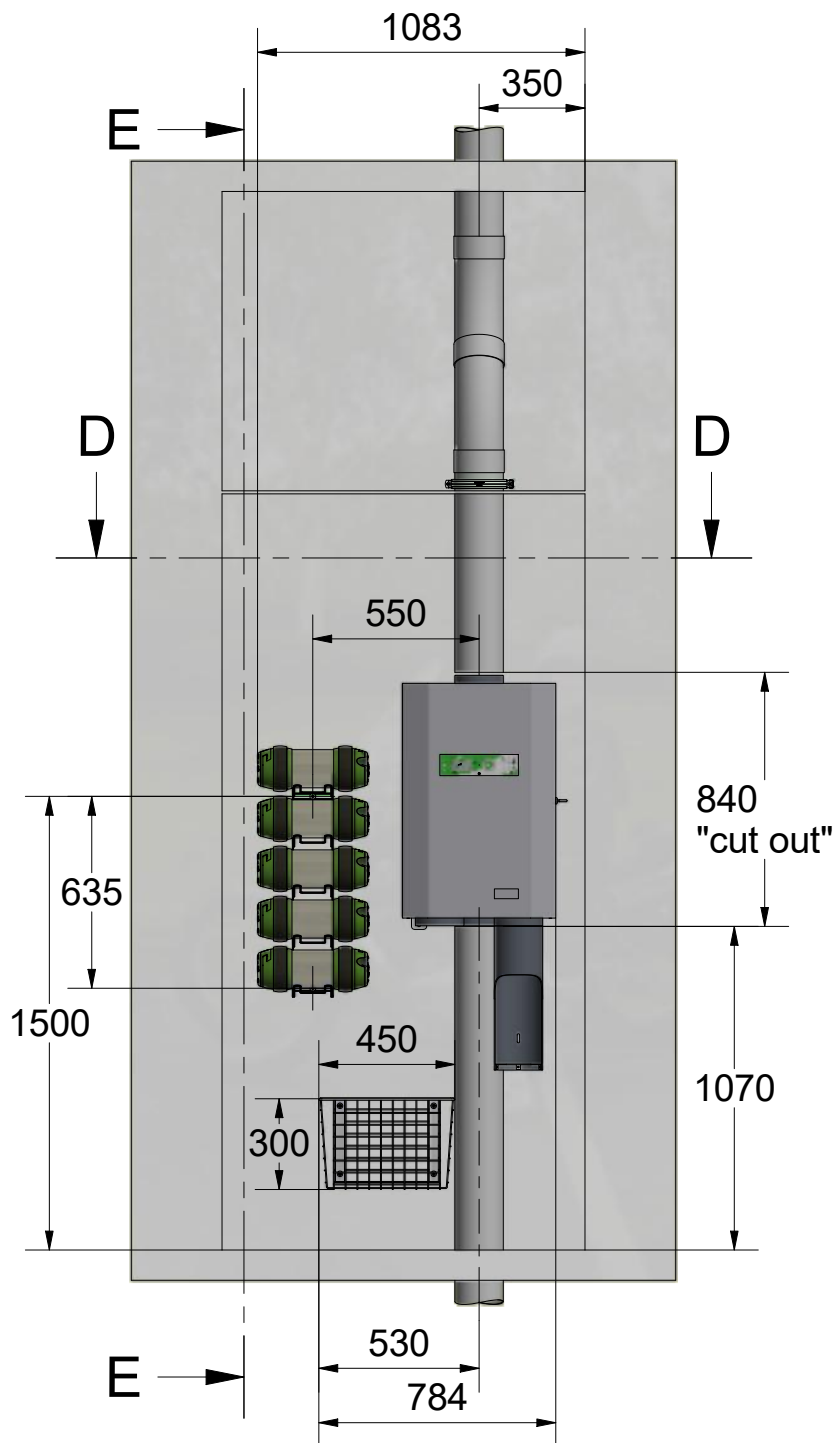



E-E (1 : 25)

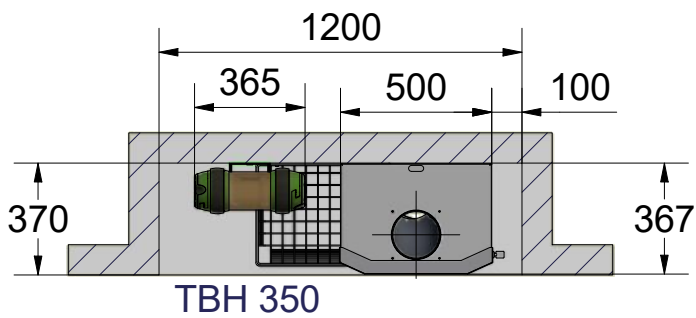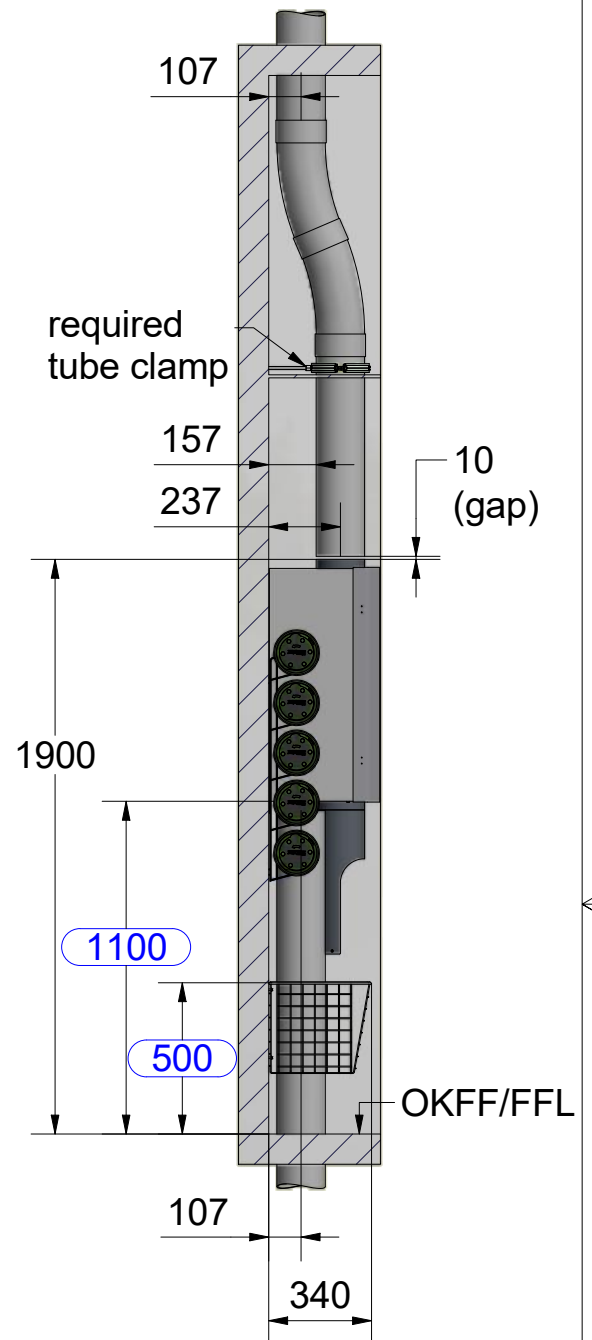



D-D (1 : 25)

Do not install any tube clamp under the station/above the basket area
It may collide with the carriers

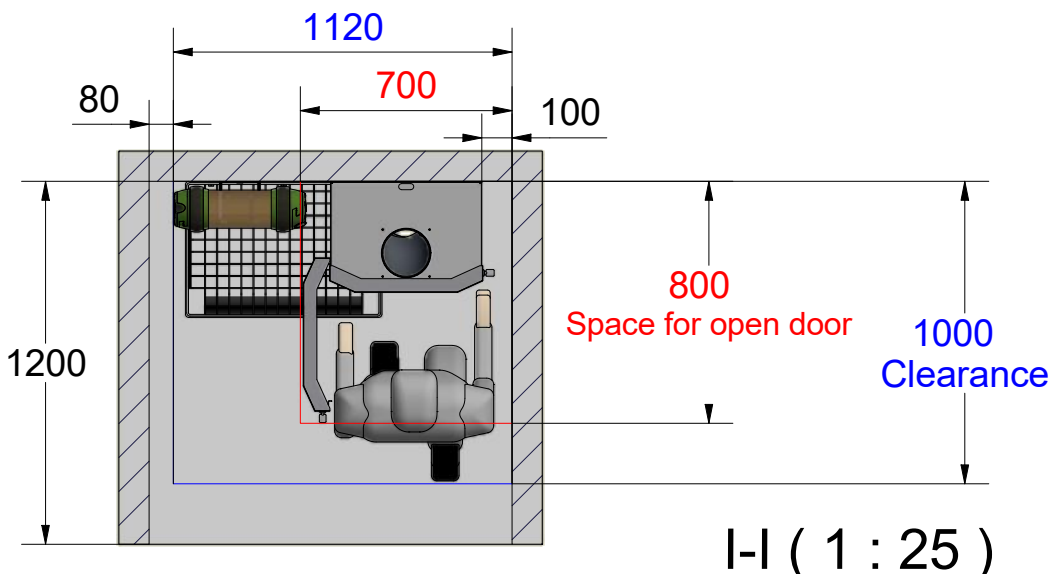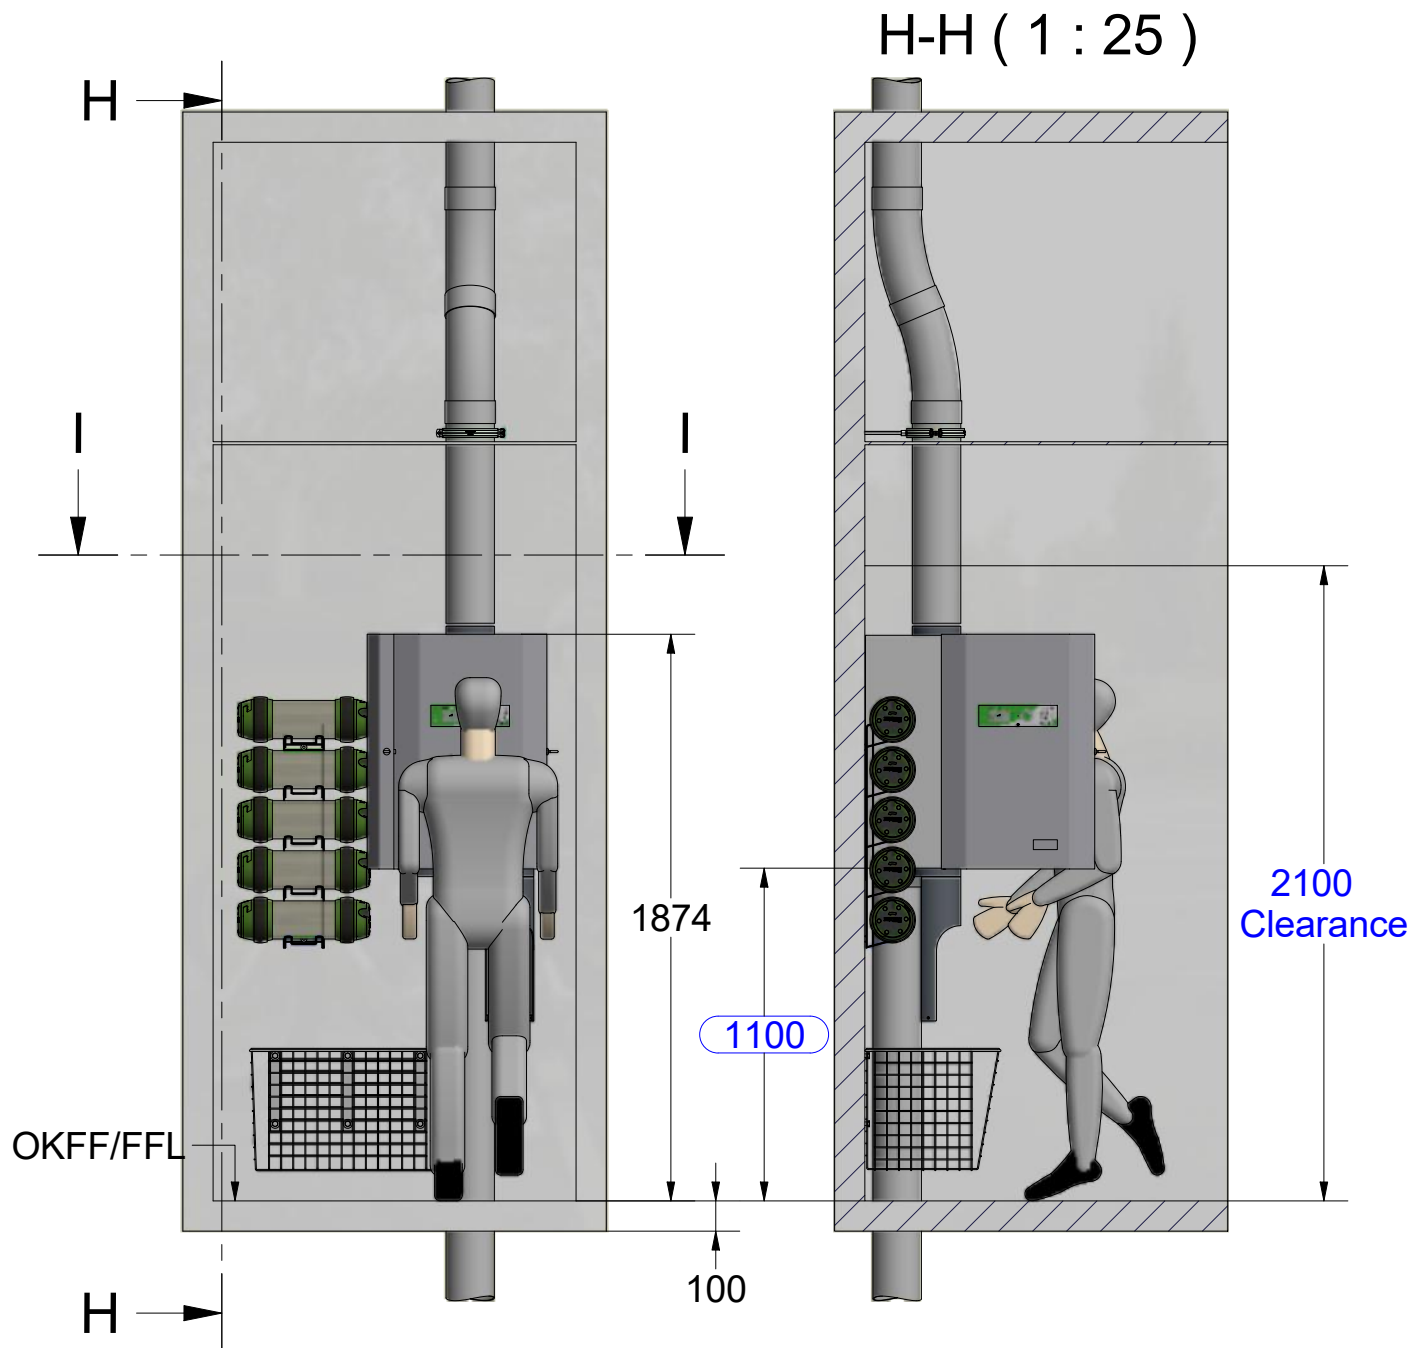


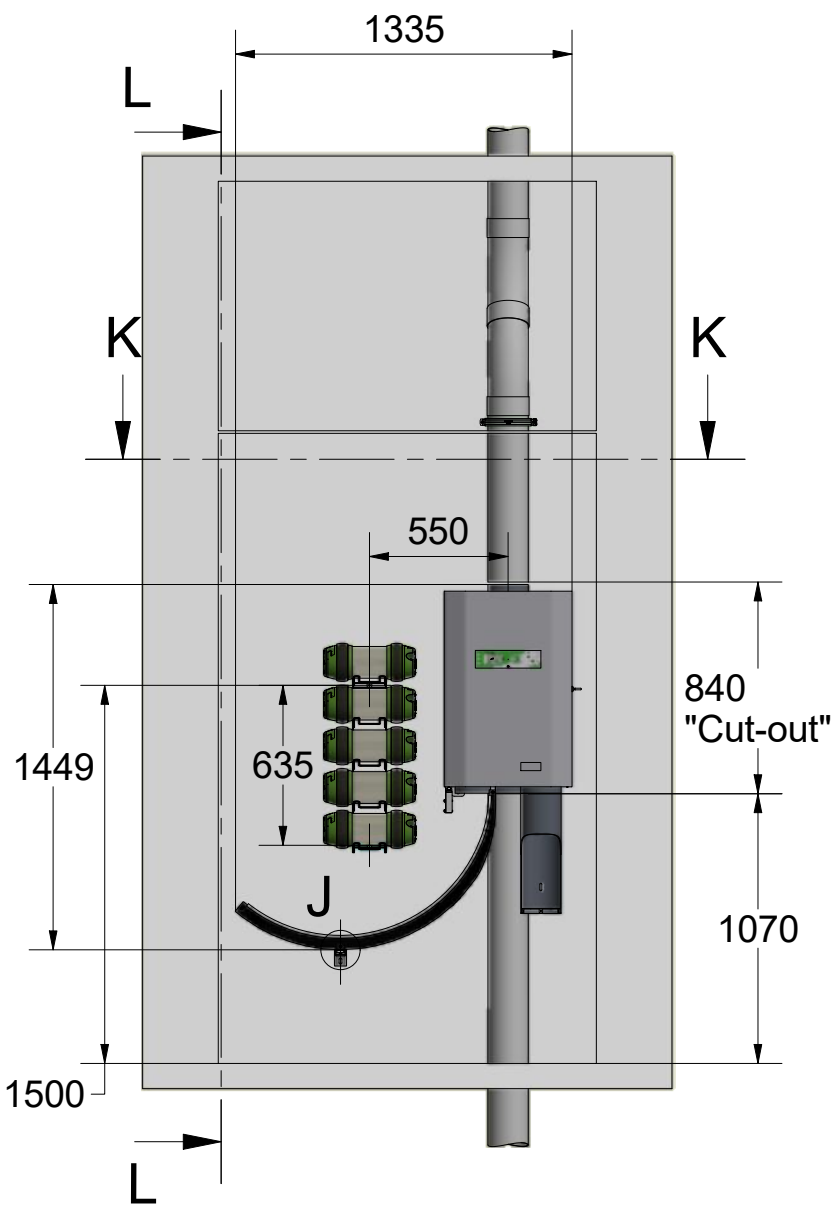





L-L (1 : 30)

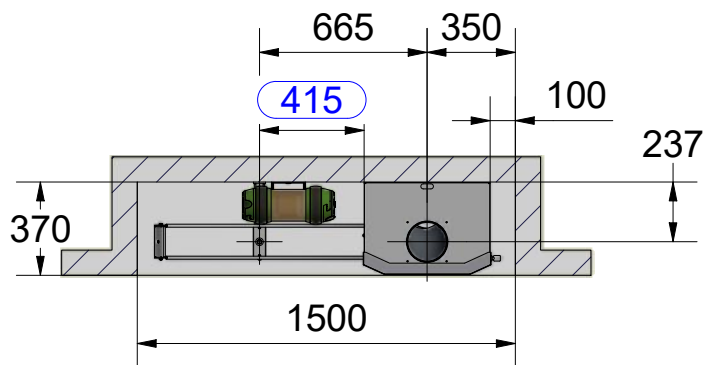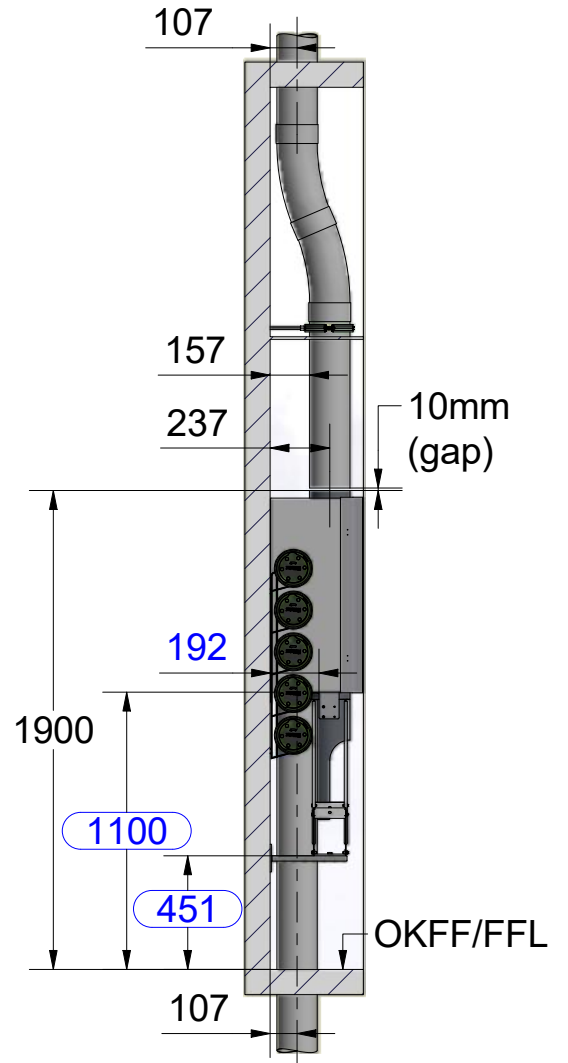


K-K (1 : 30)

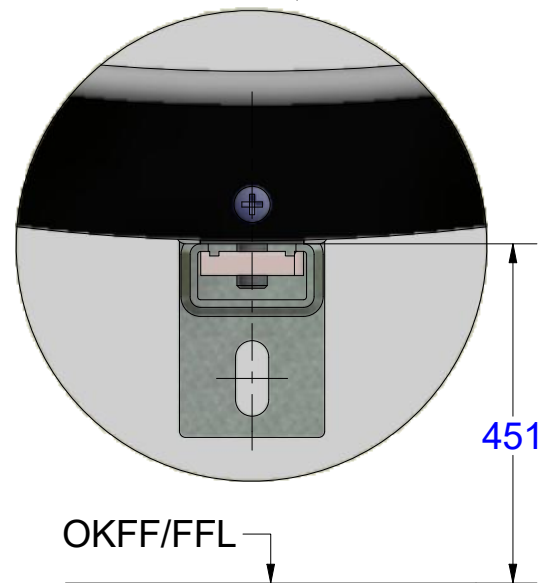


J (1 : 2,5)

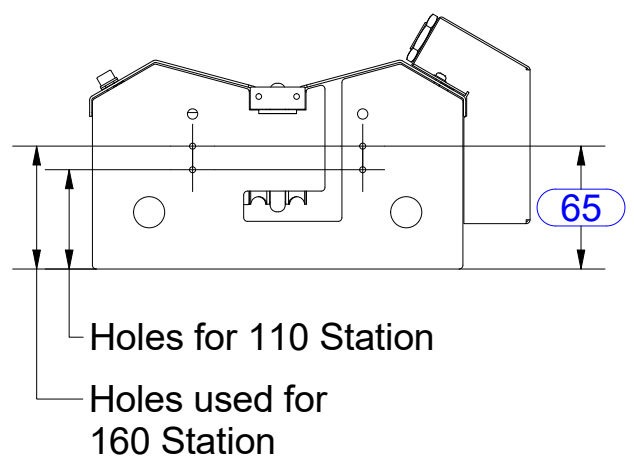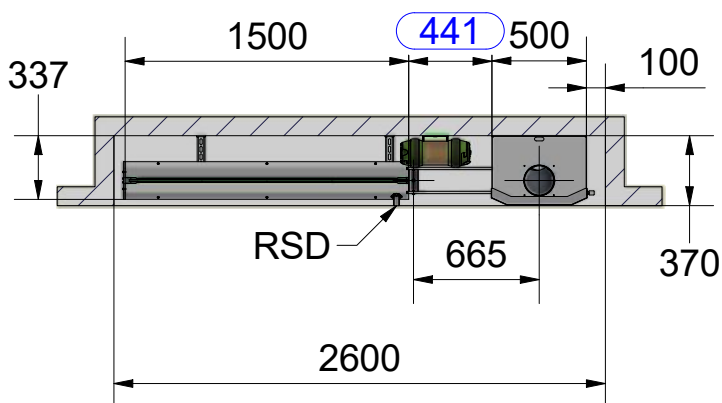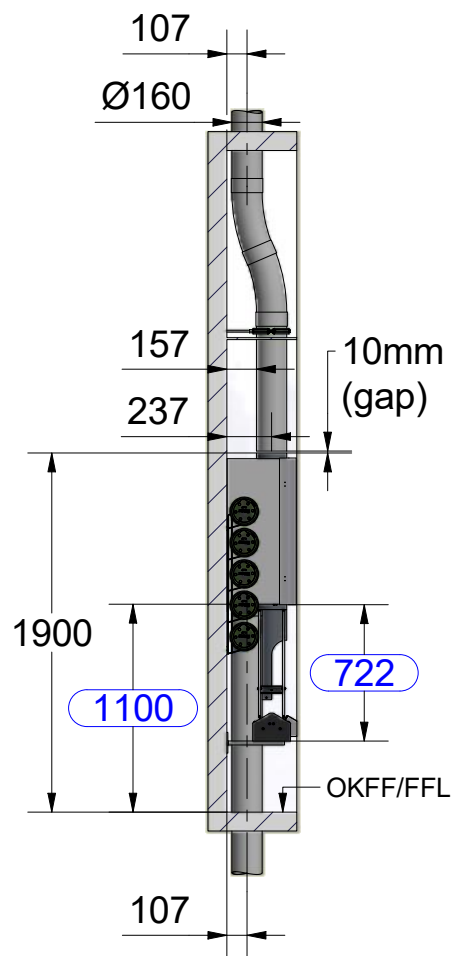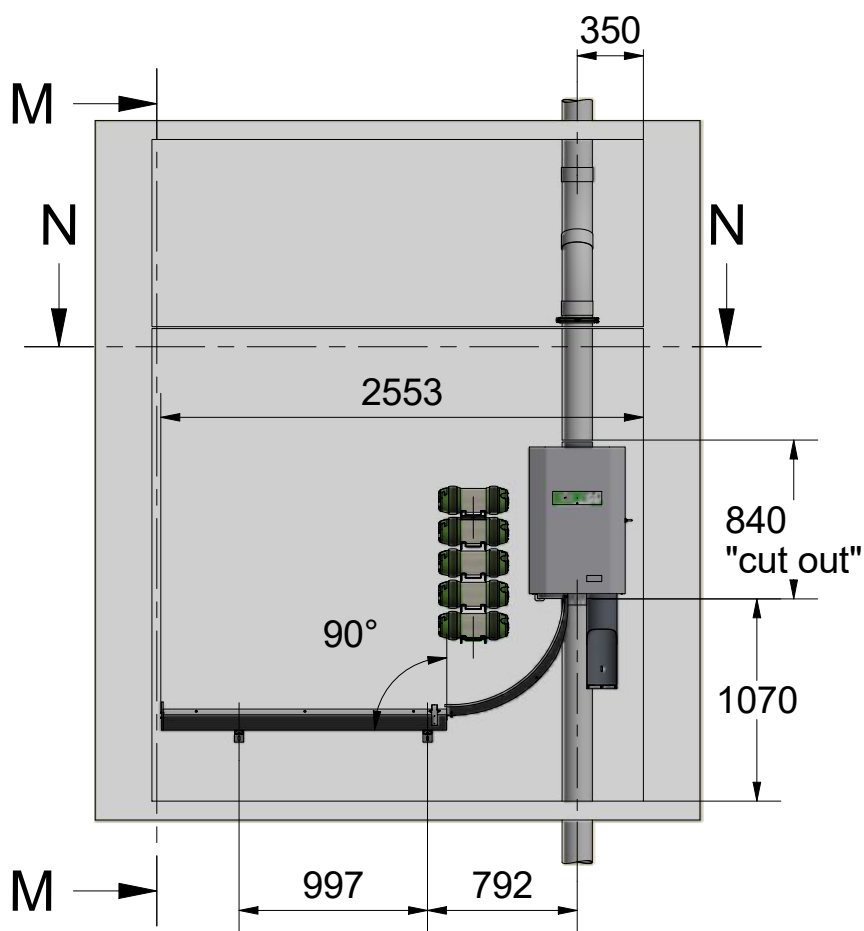

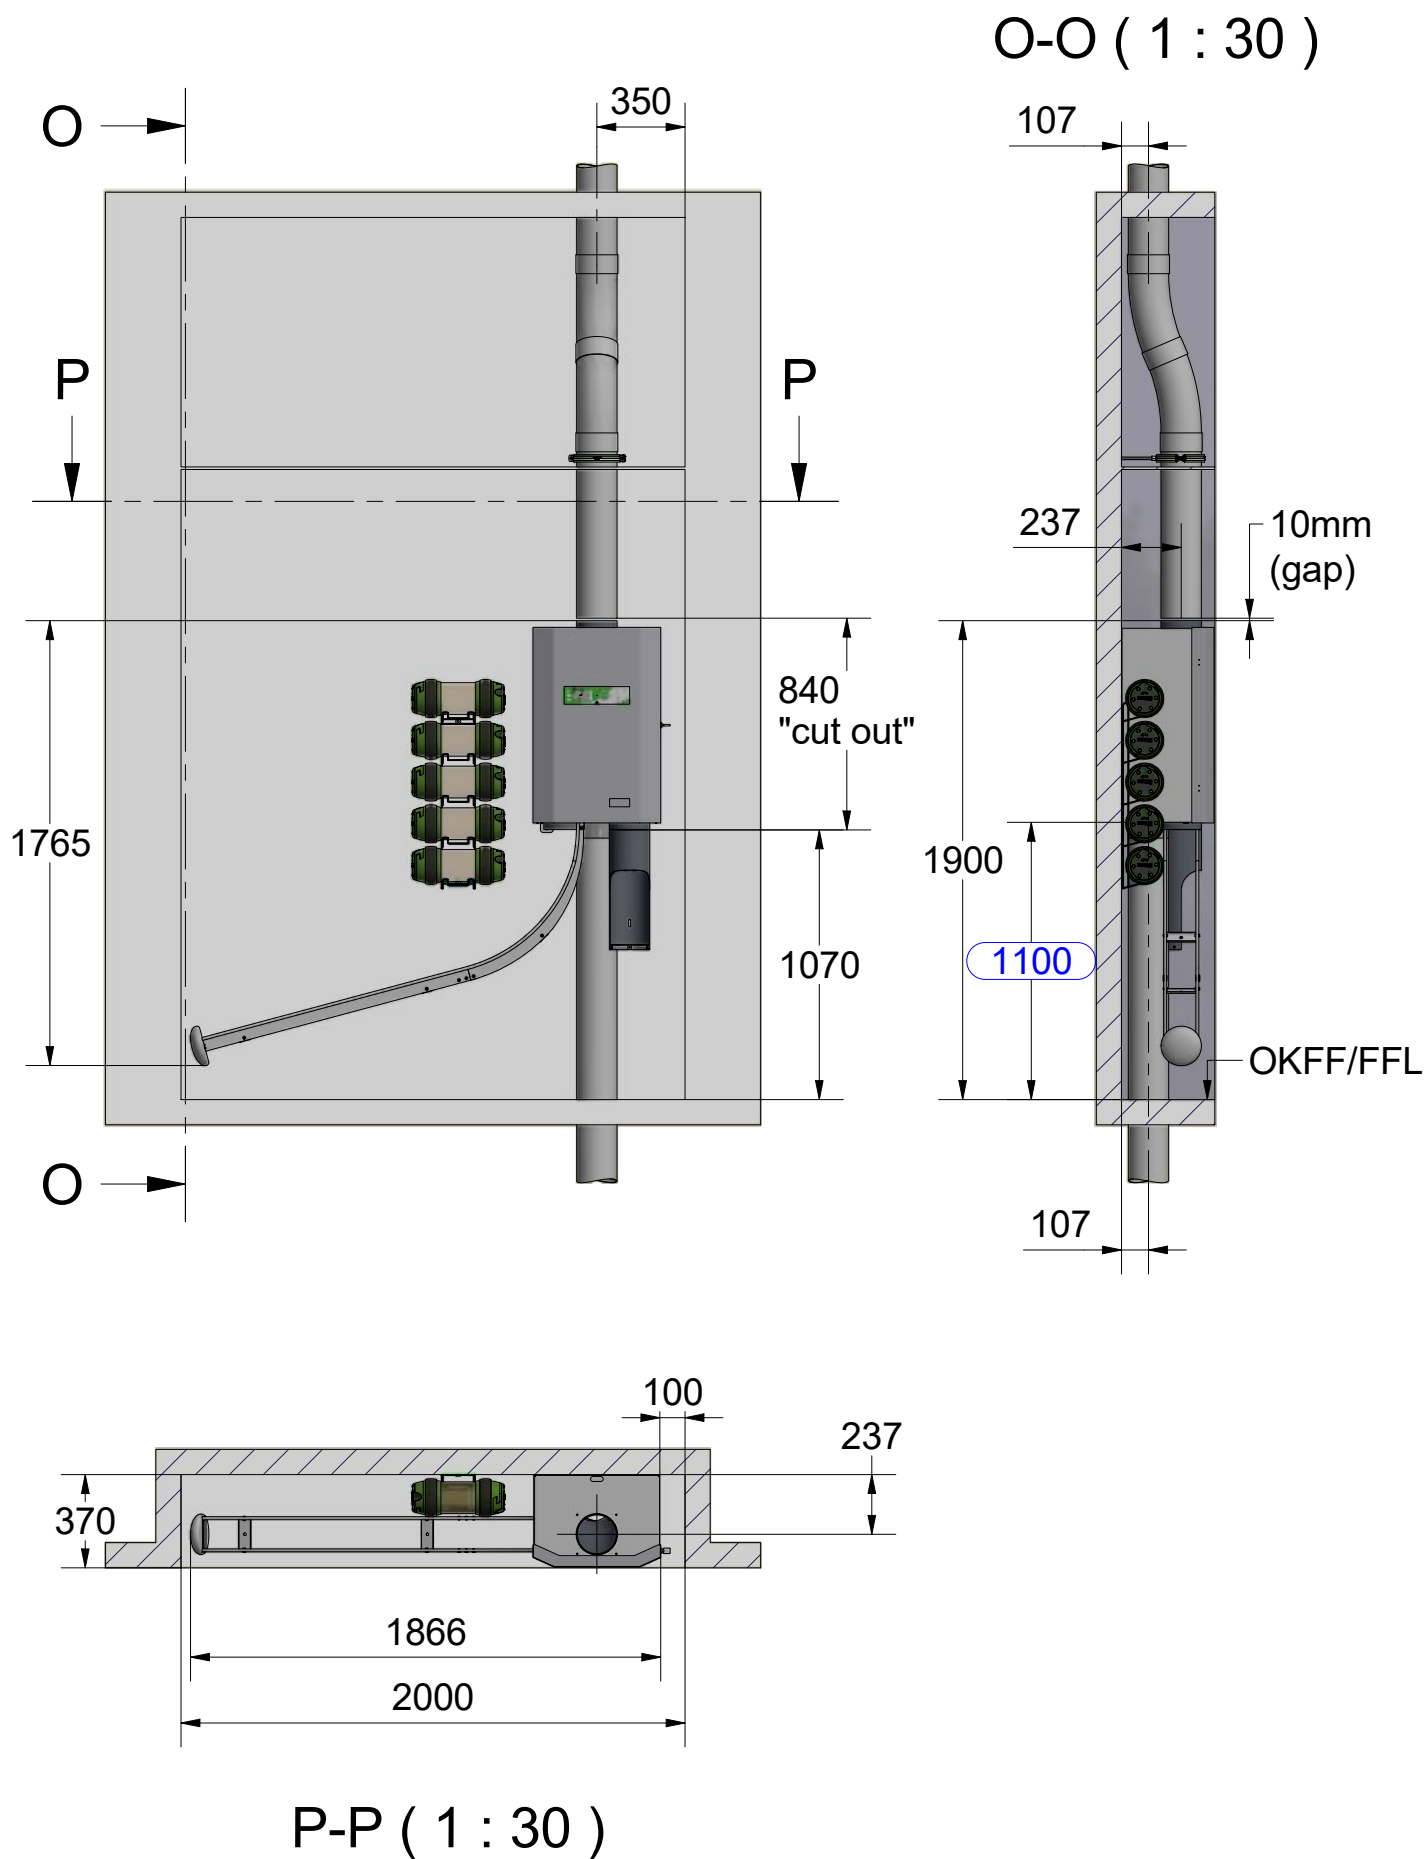






Q →

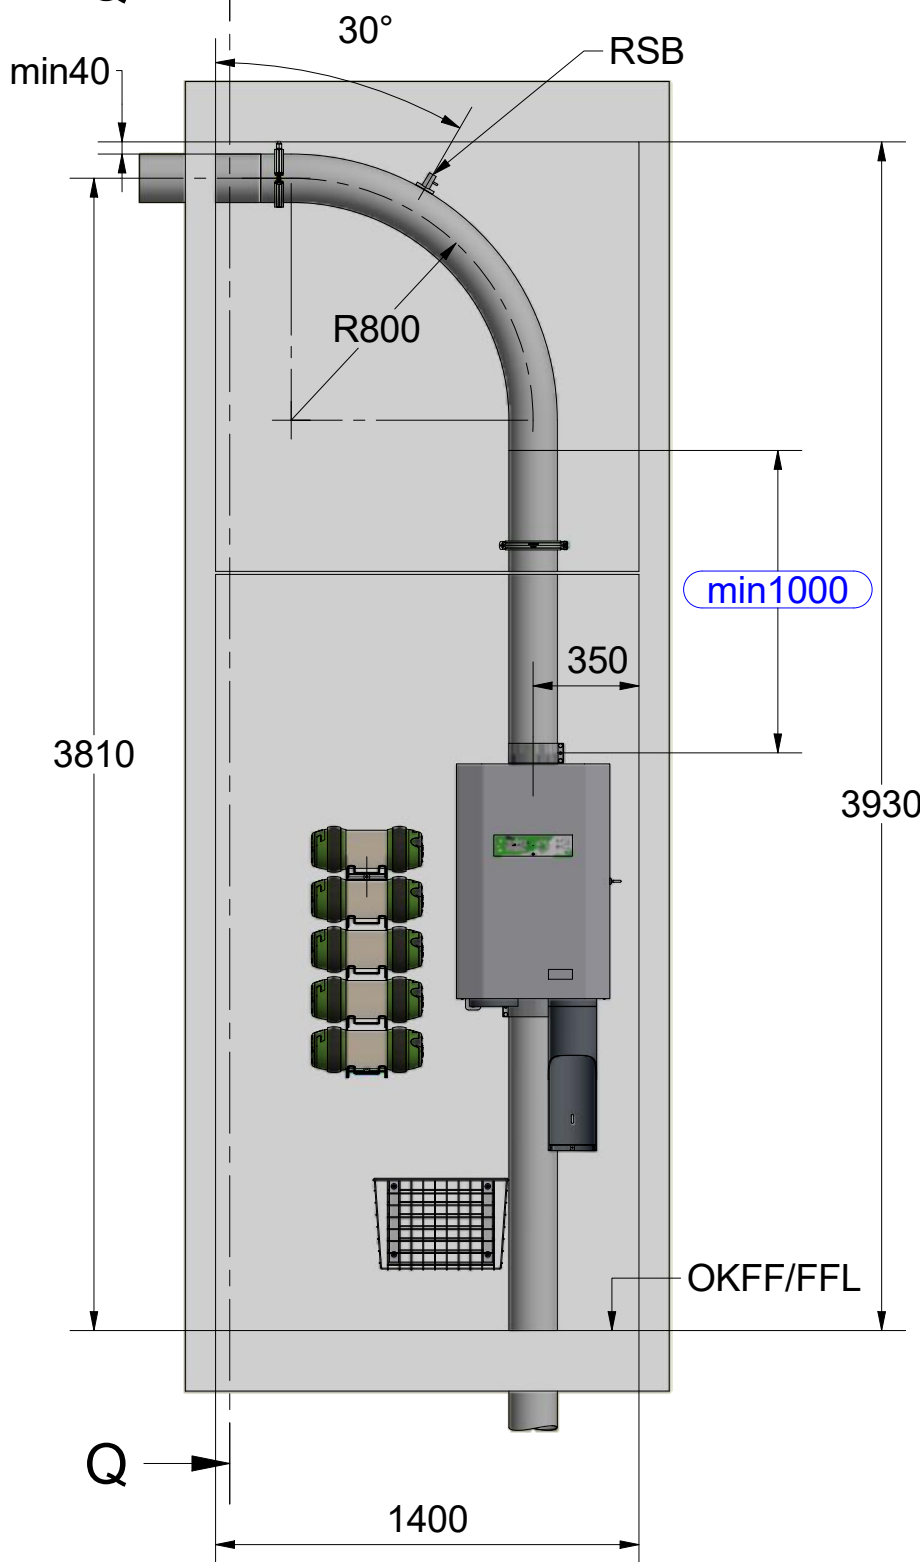

Q-Q (1 : 25)

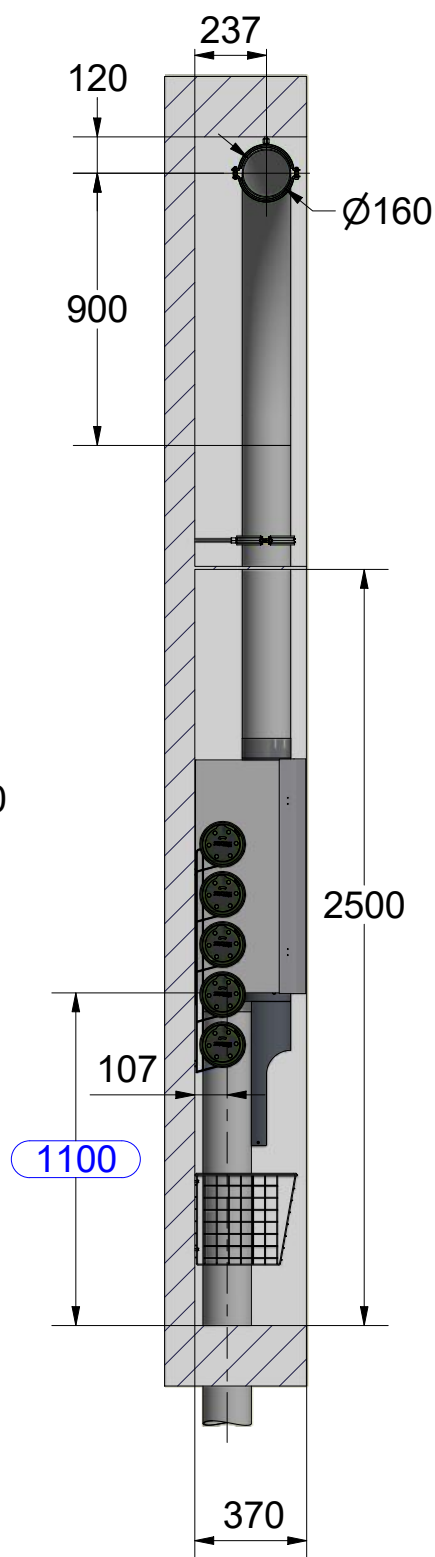

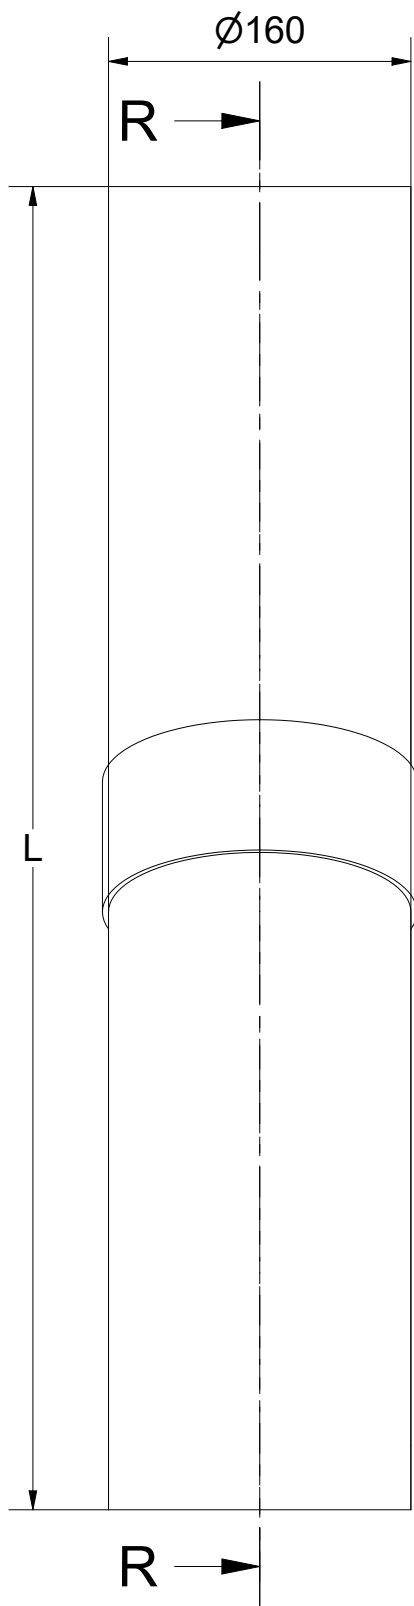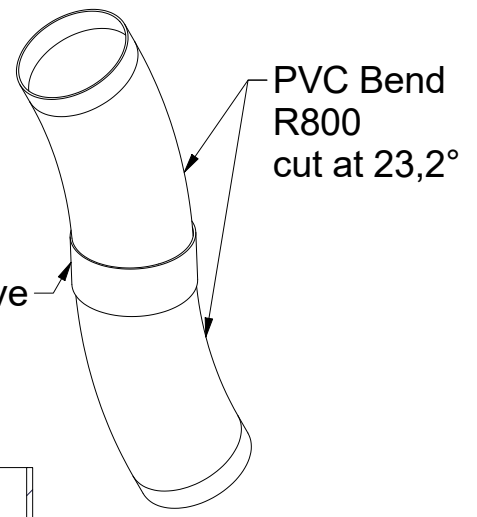

Straight end
Minimum=34mm

356,33
(23,2°)

R800 Z

75

356,33
(23,2°)

130

Straight end
Min=34mm

R-R (1 : 4)

