


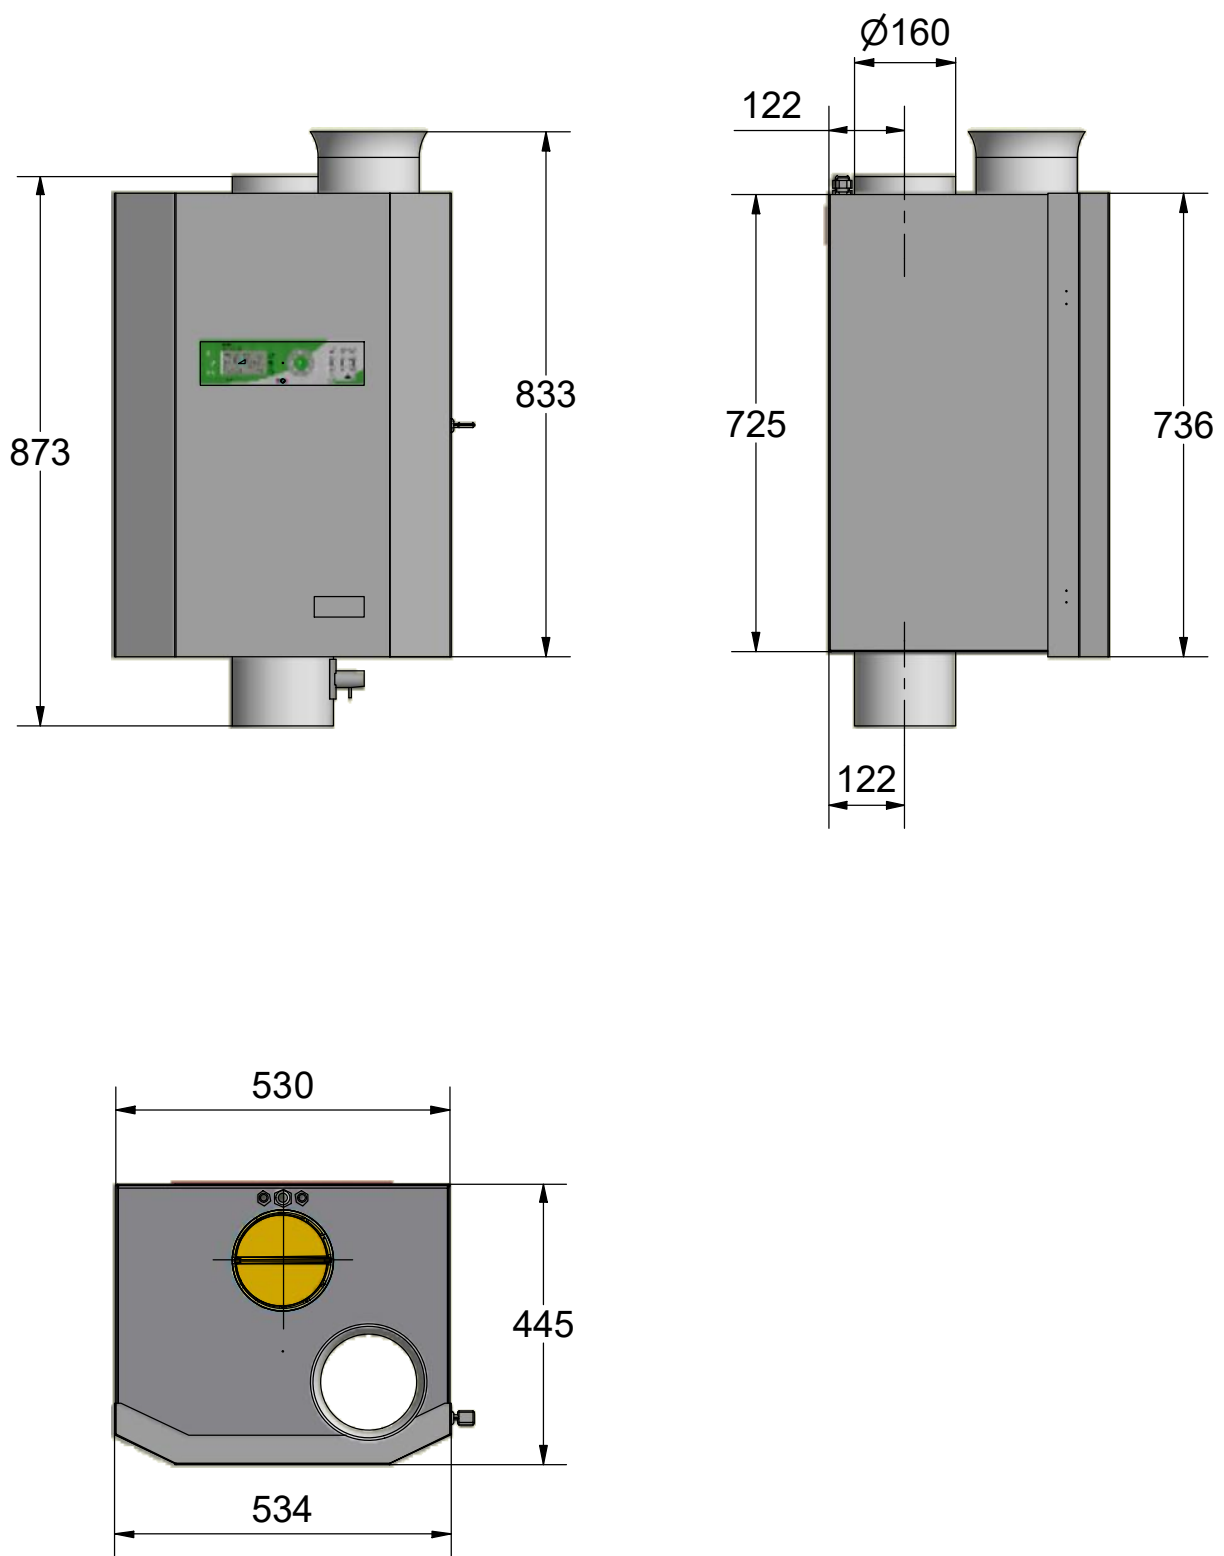


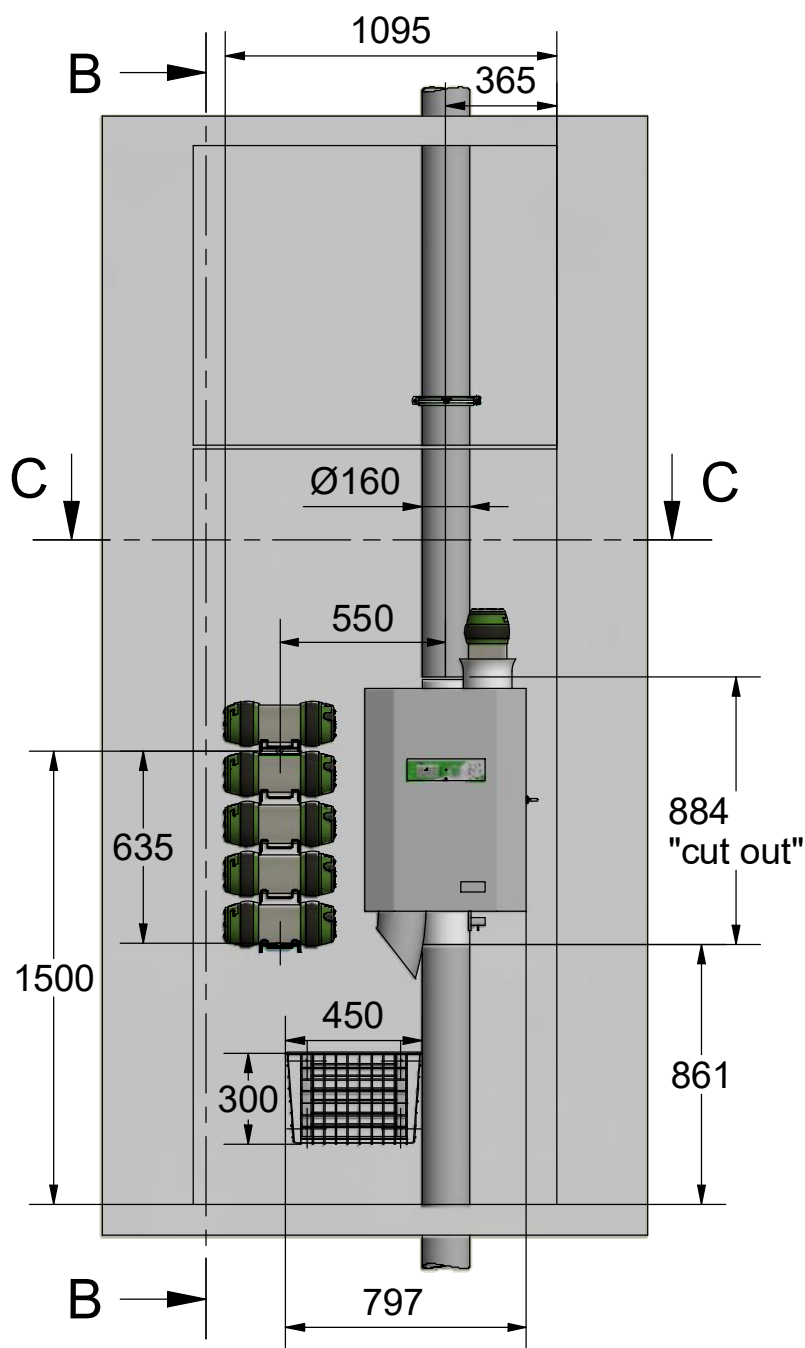

In the interest of continuous improvement and upgrade of our products Hörtig reserves the right to change the technical specifications at any time, without prior notice.

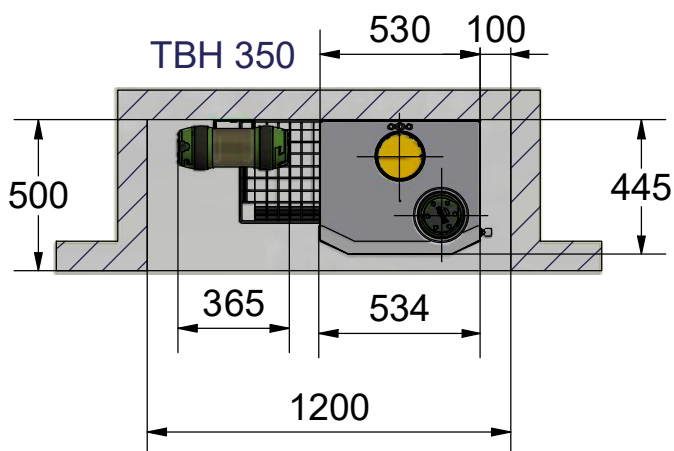


B-B (1 : 25)


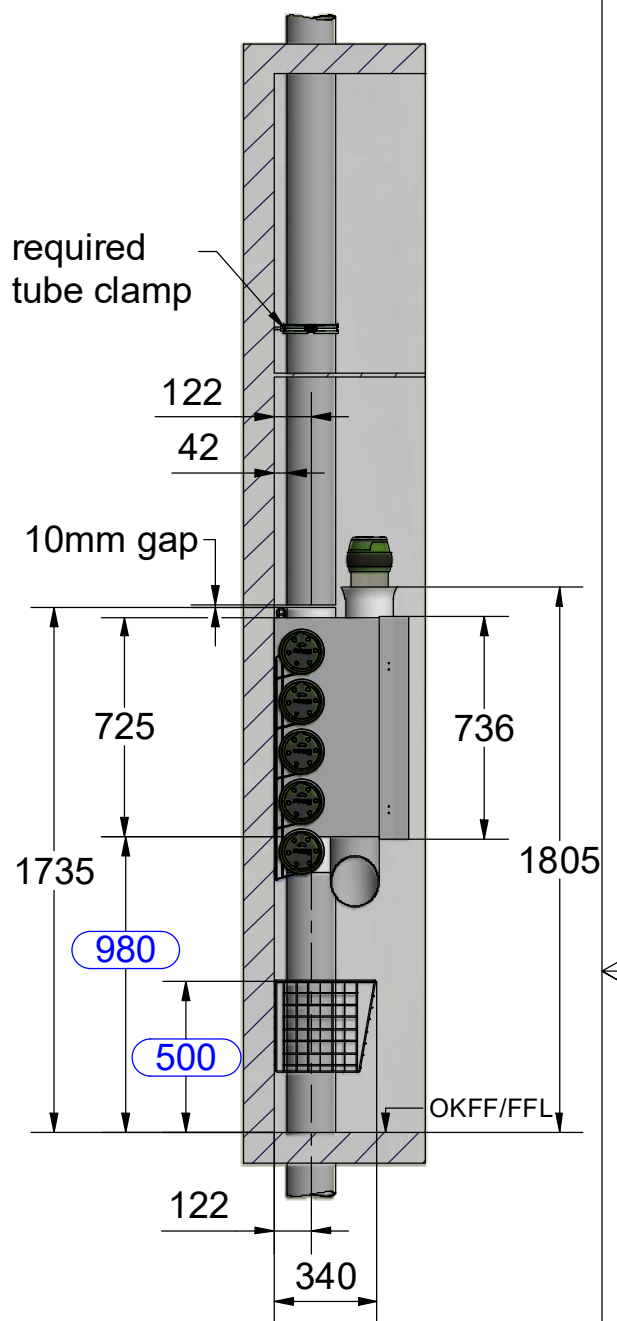


C-C (1 : 25)

Do not install any tube clamp under the station/above the basket area
It may collide with the carriers

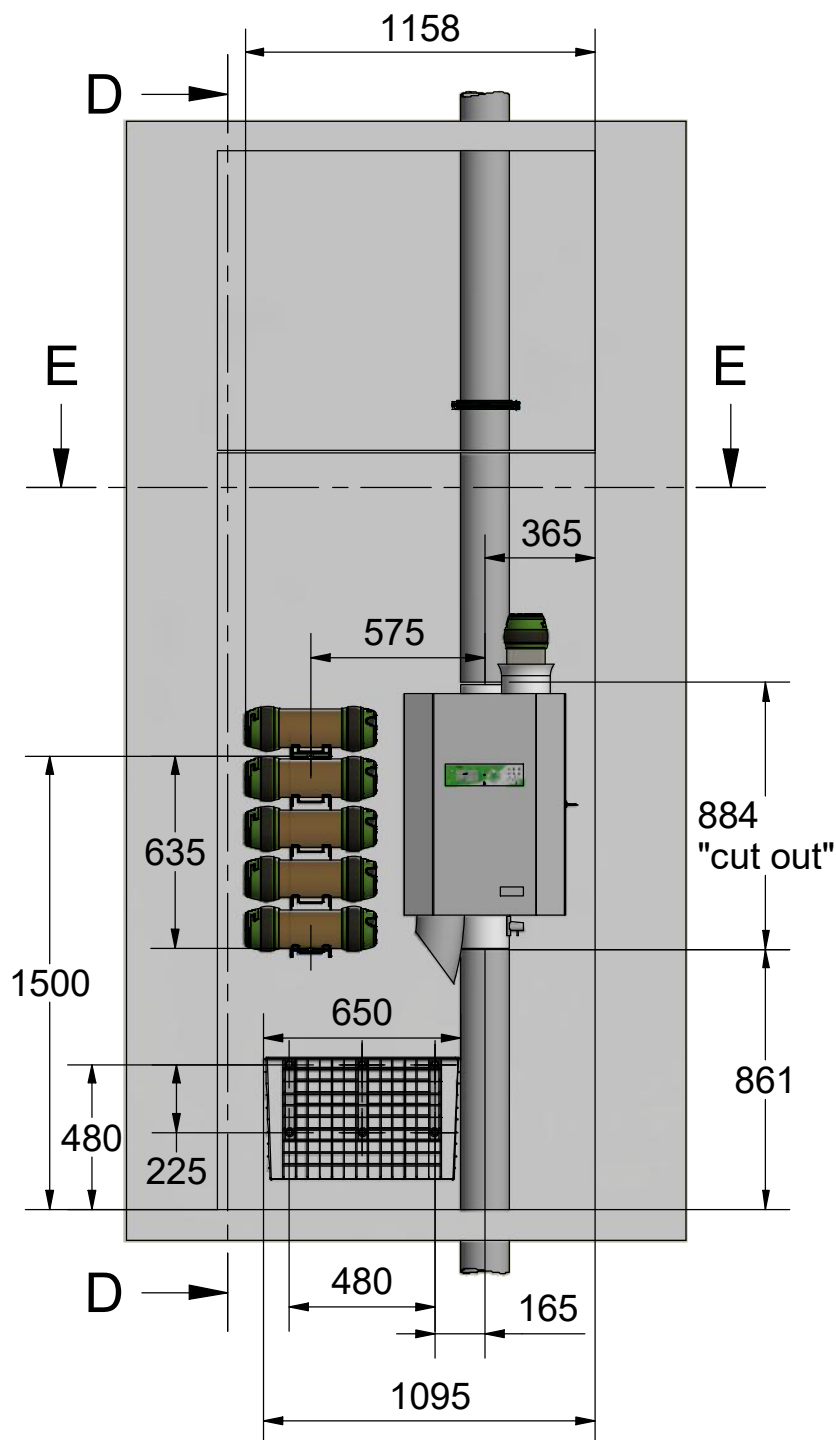

D-D (1 : 25)

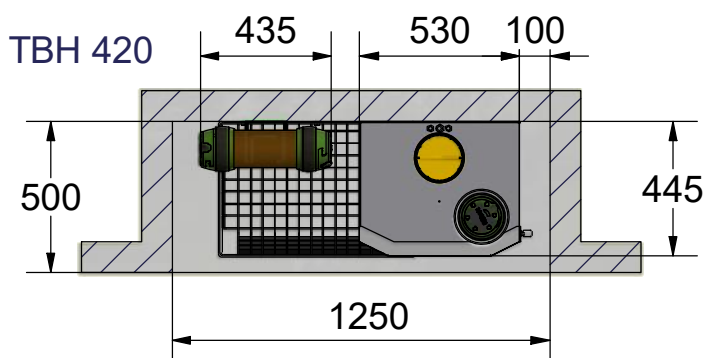
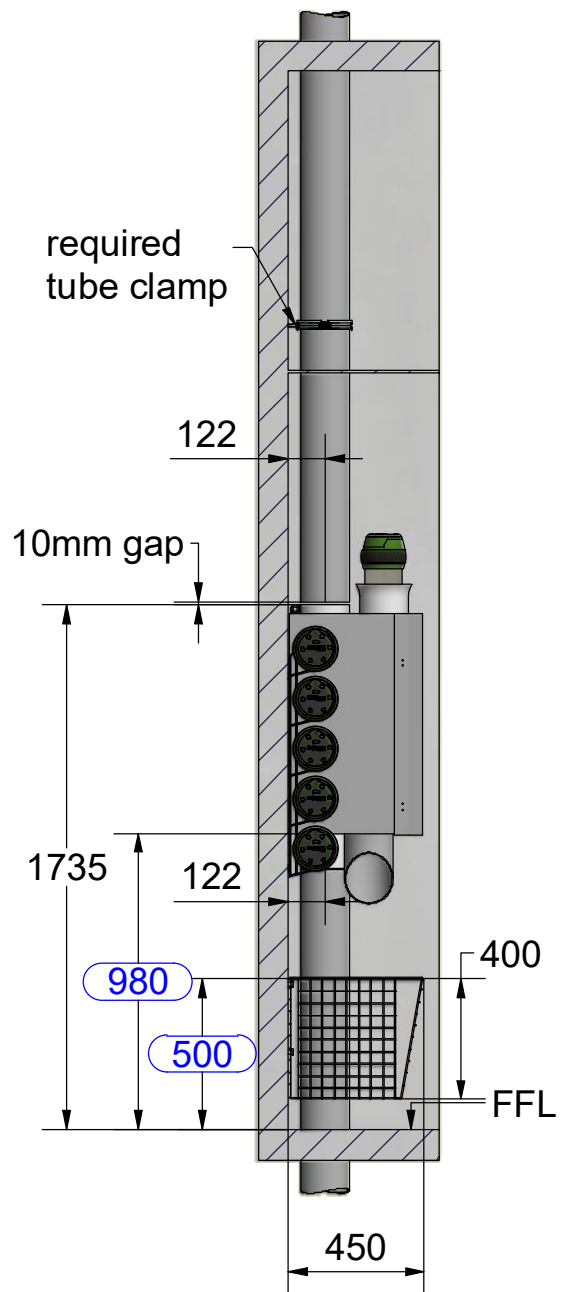



E-E (1 : 25)




Do not install any tube clamp under the station/above the basket area
It may collide with the carriers



F-F (1 : 30)

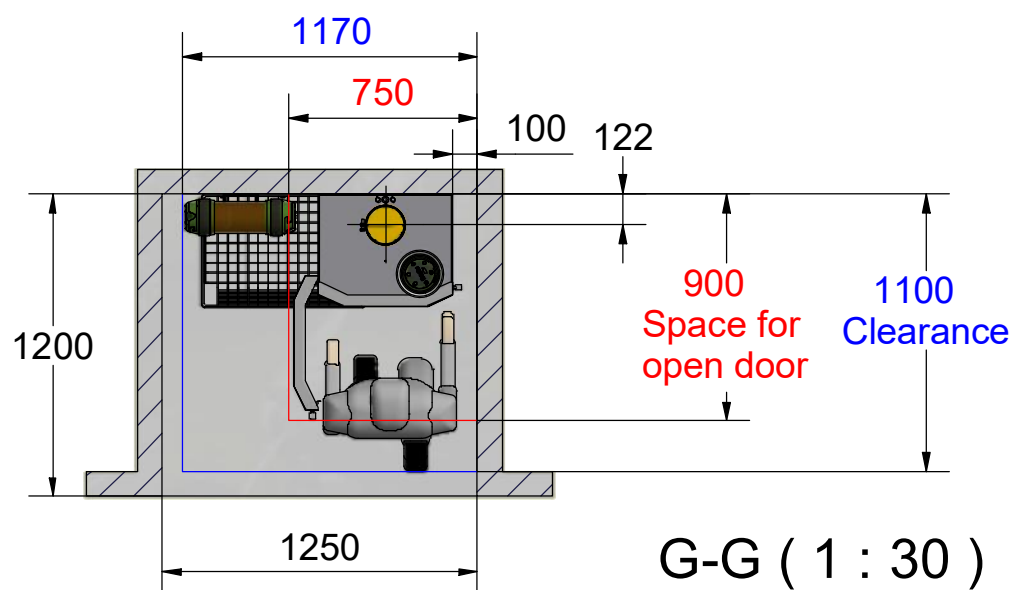
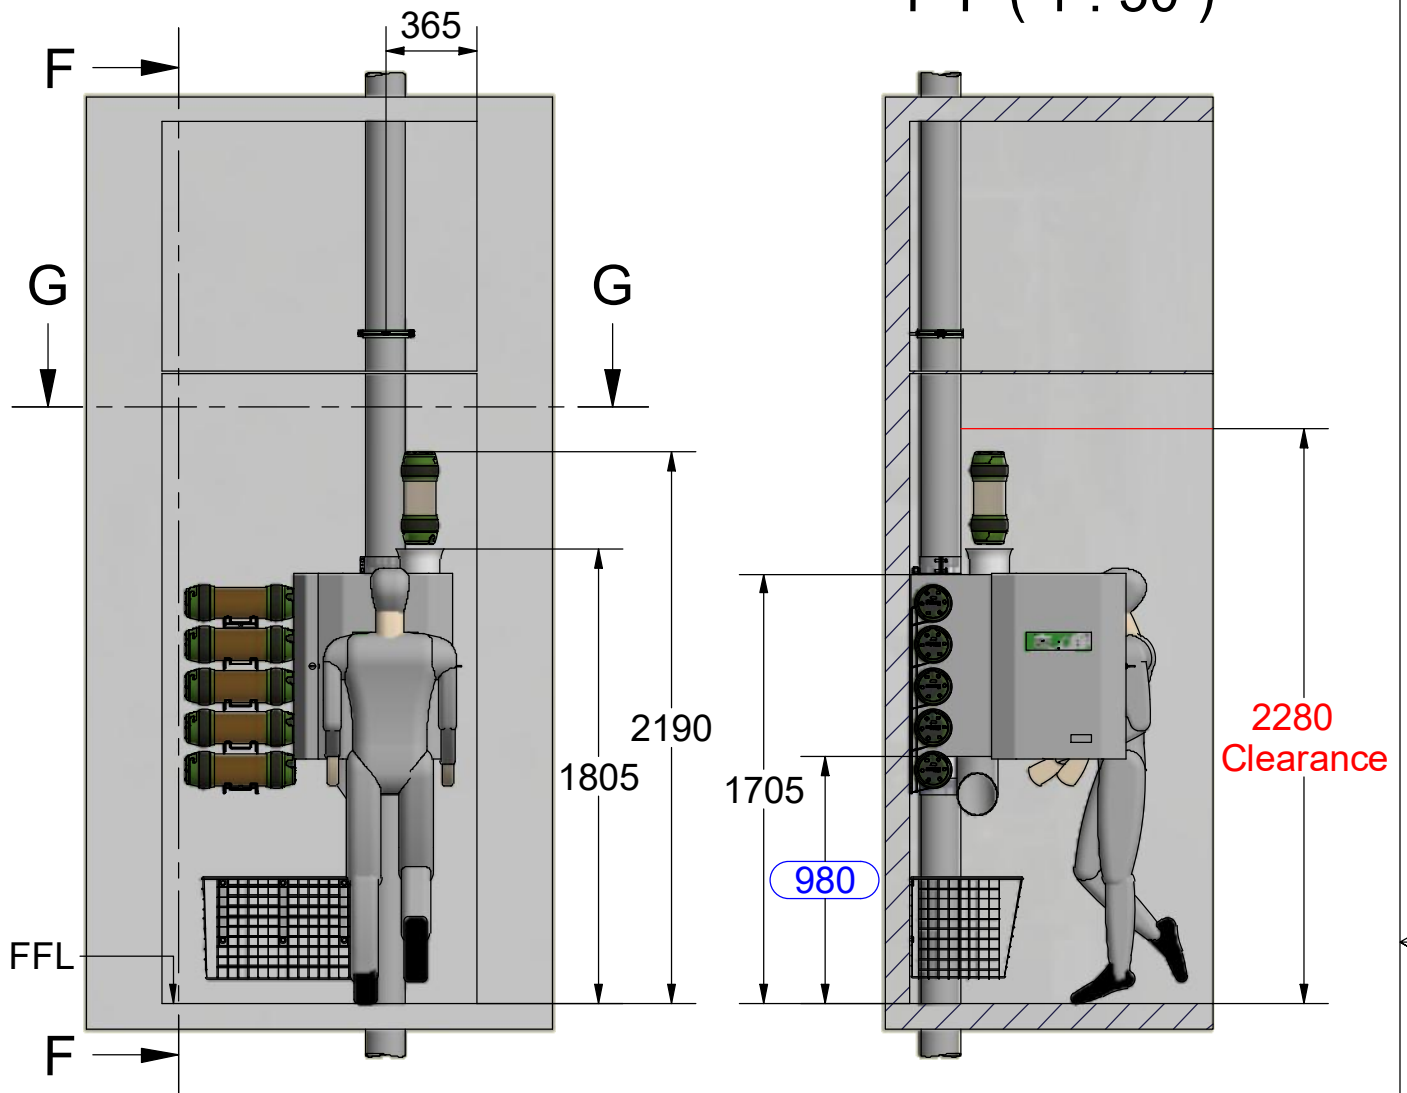


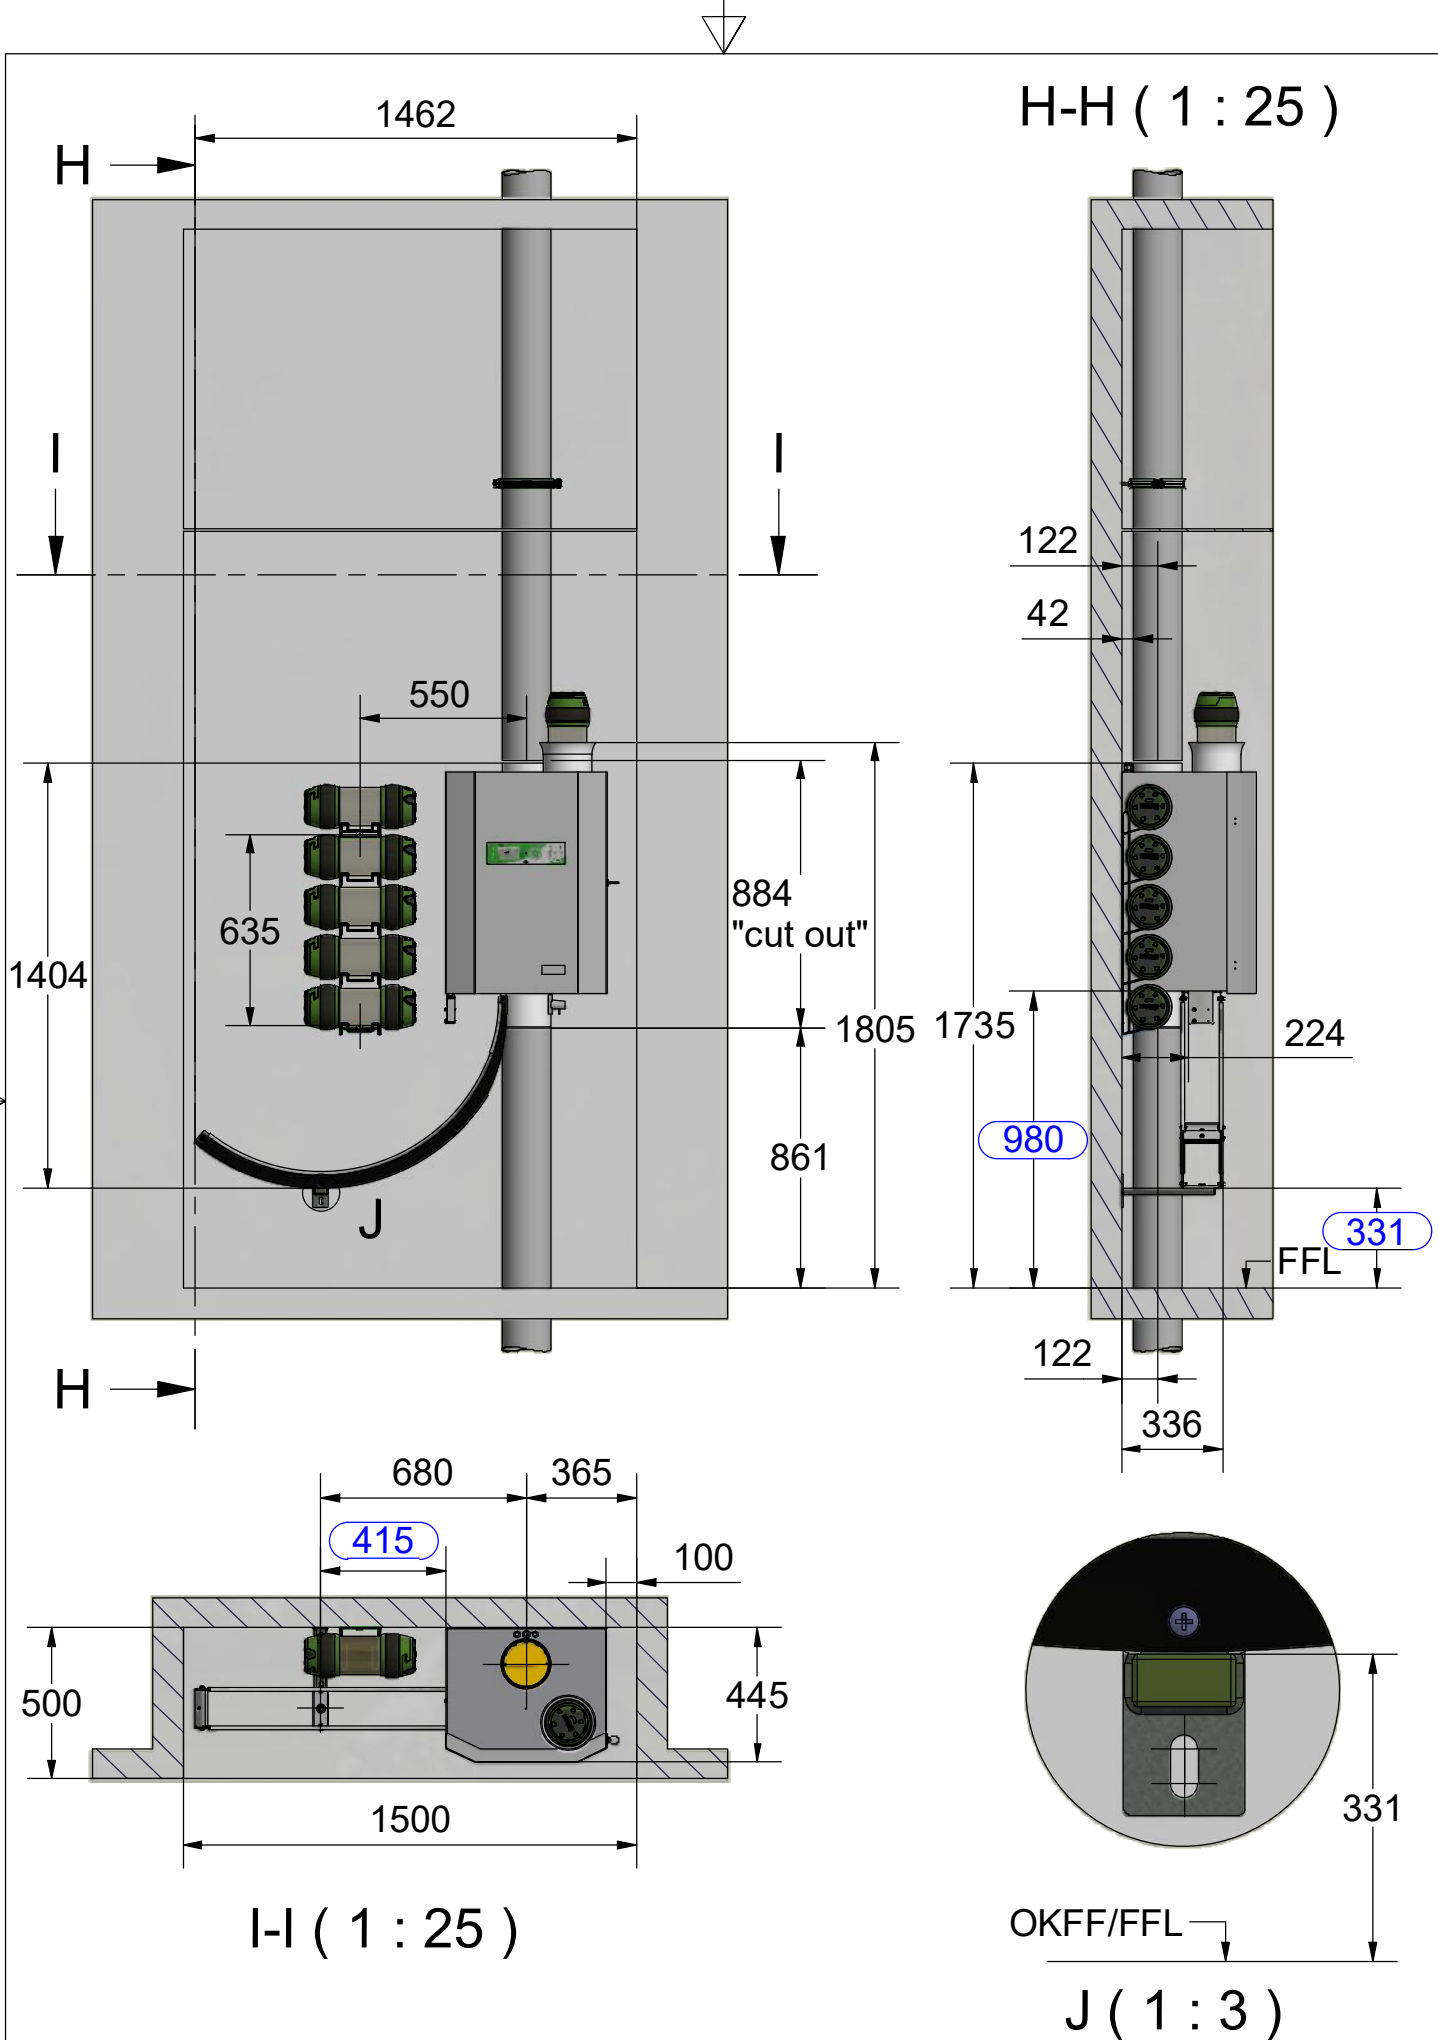

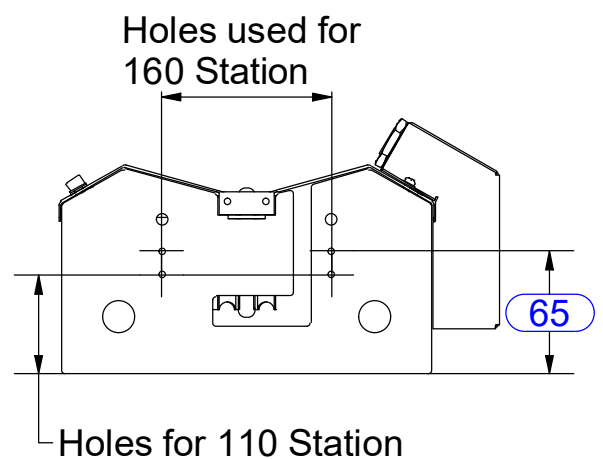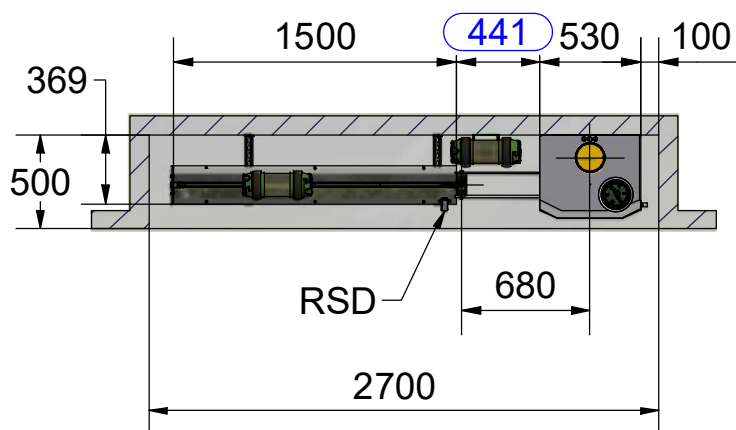



L-L (1 : 40)


M-M (1 : 30)

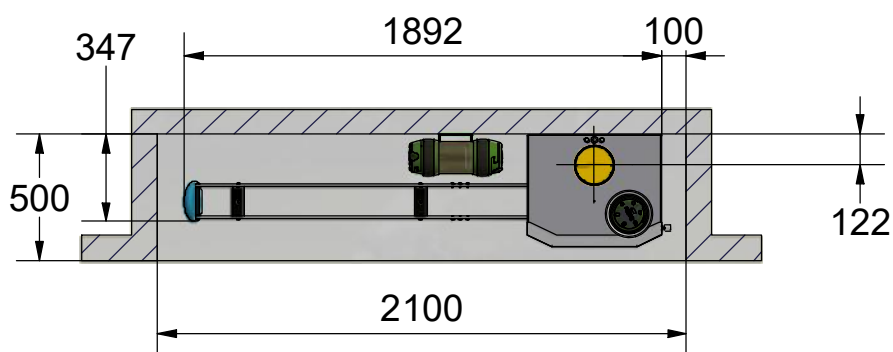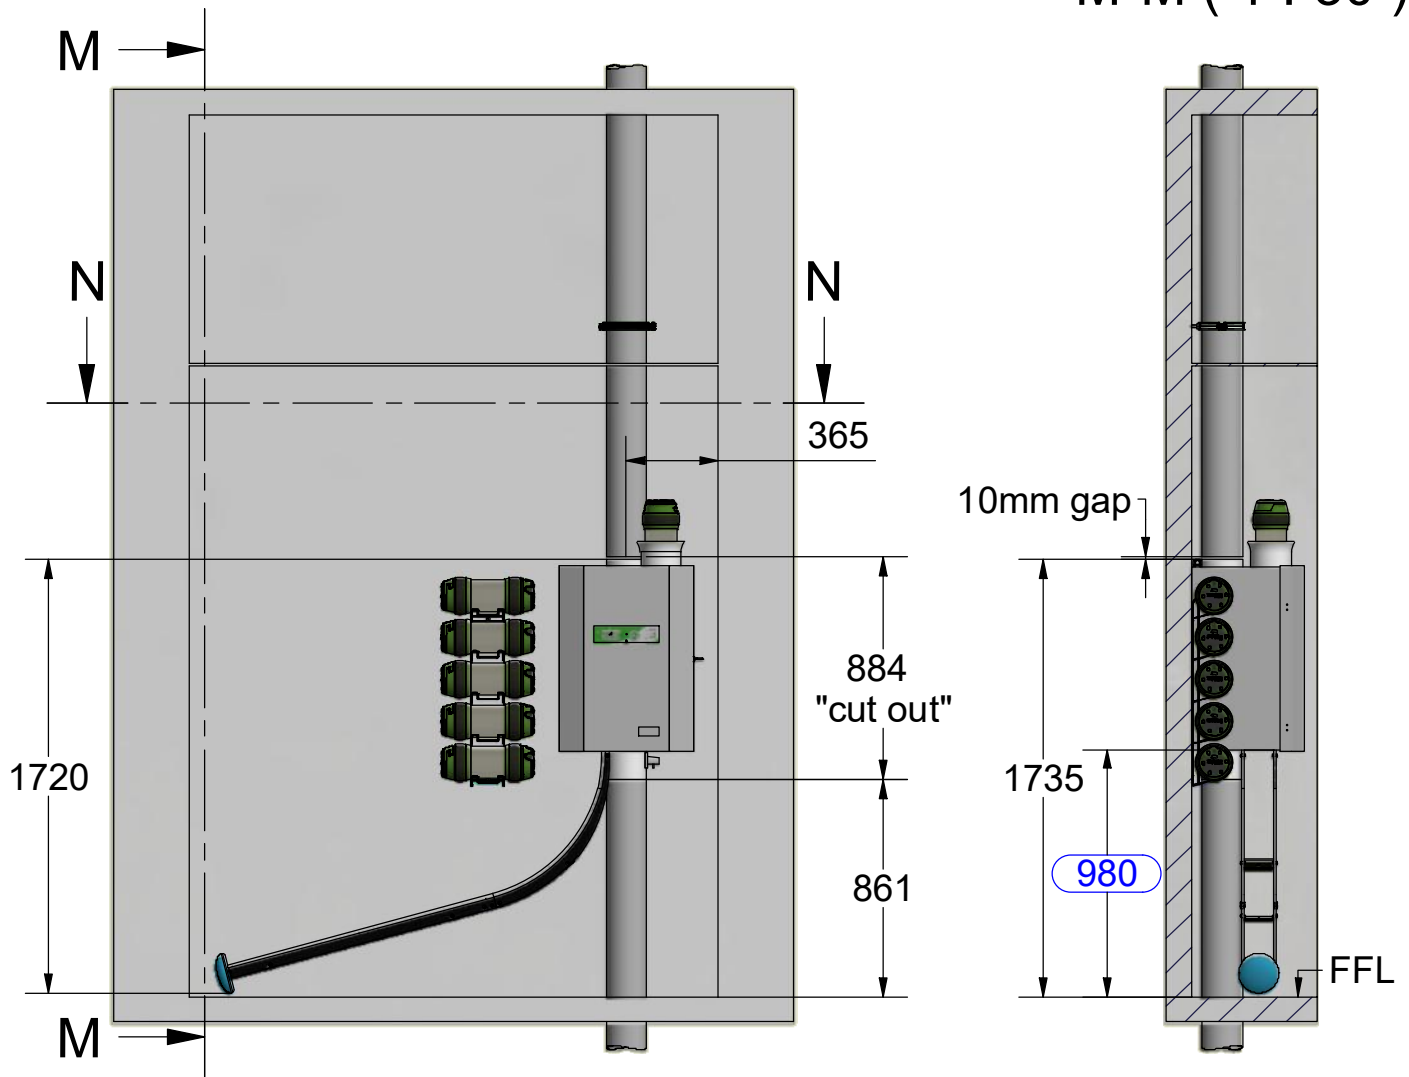


N-N (1 : 30)

O-O (1 : 25)

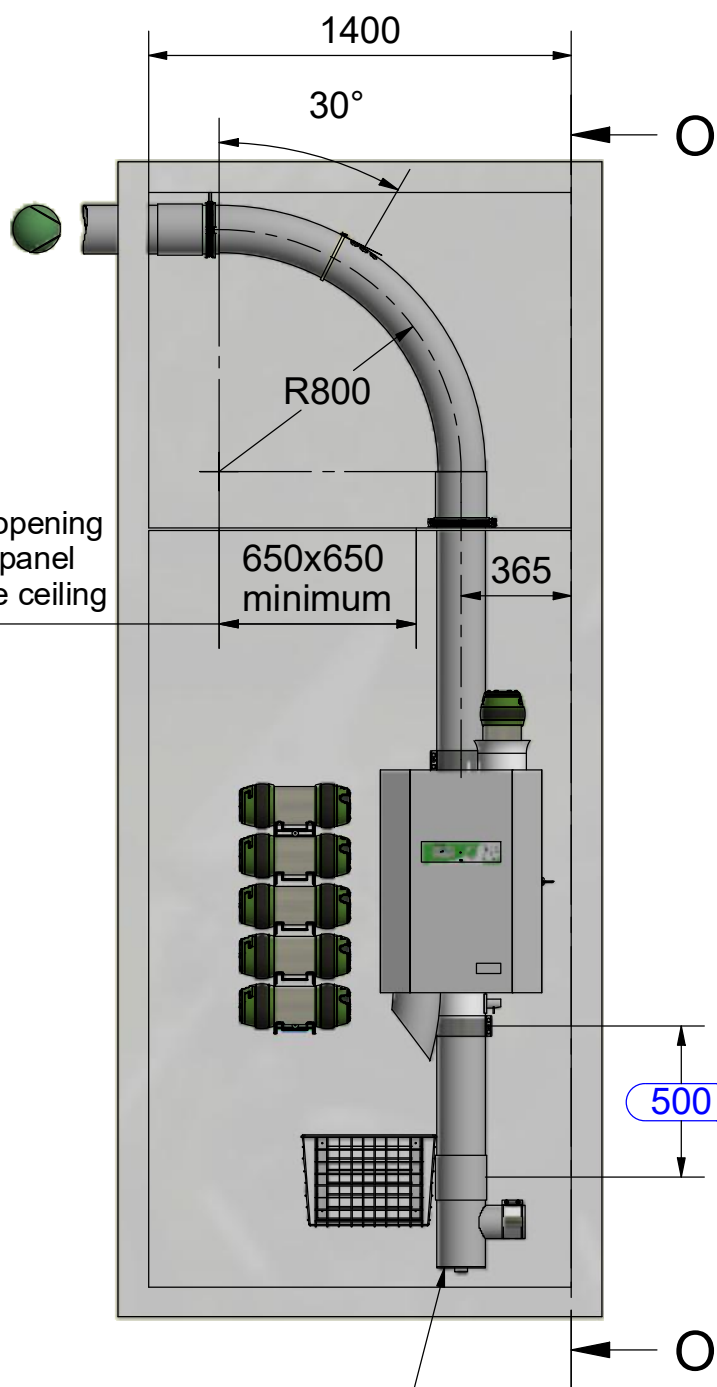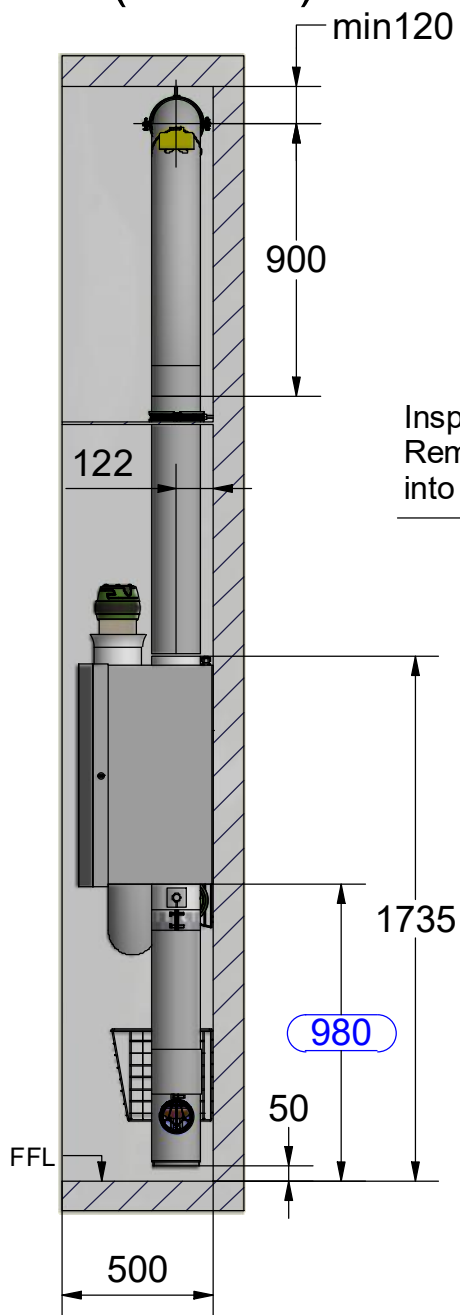

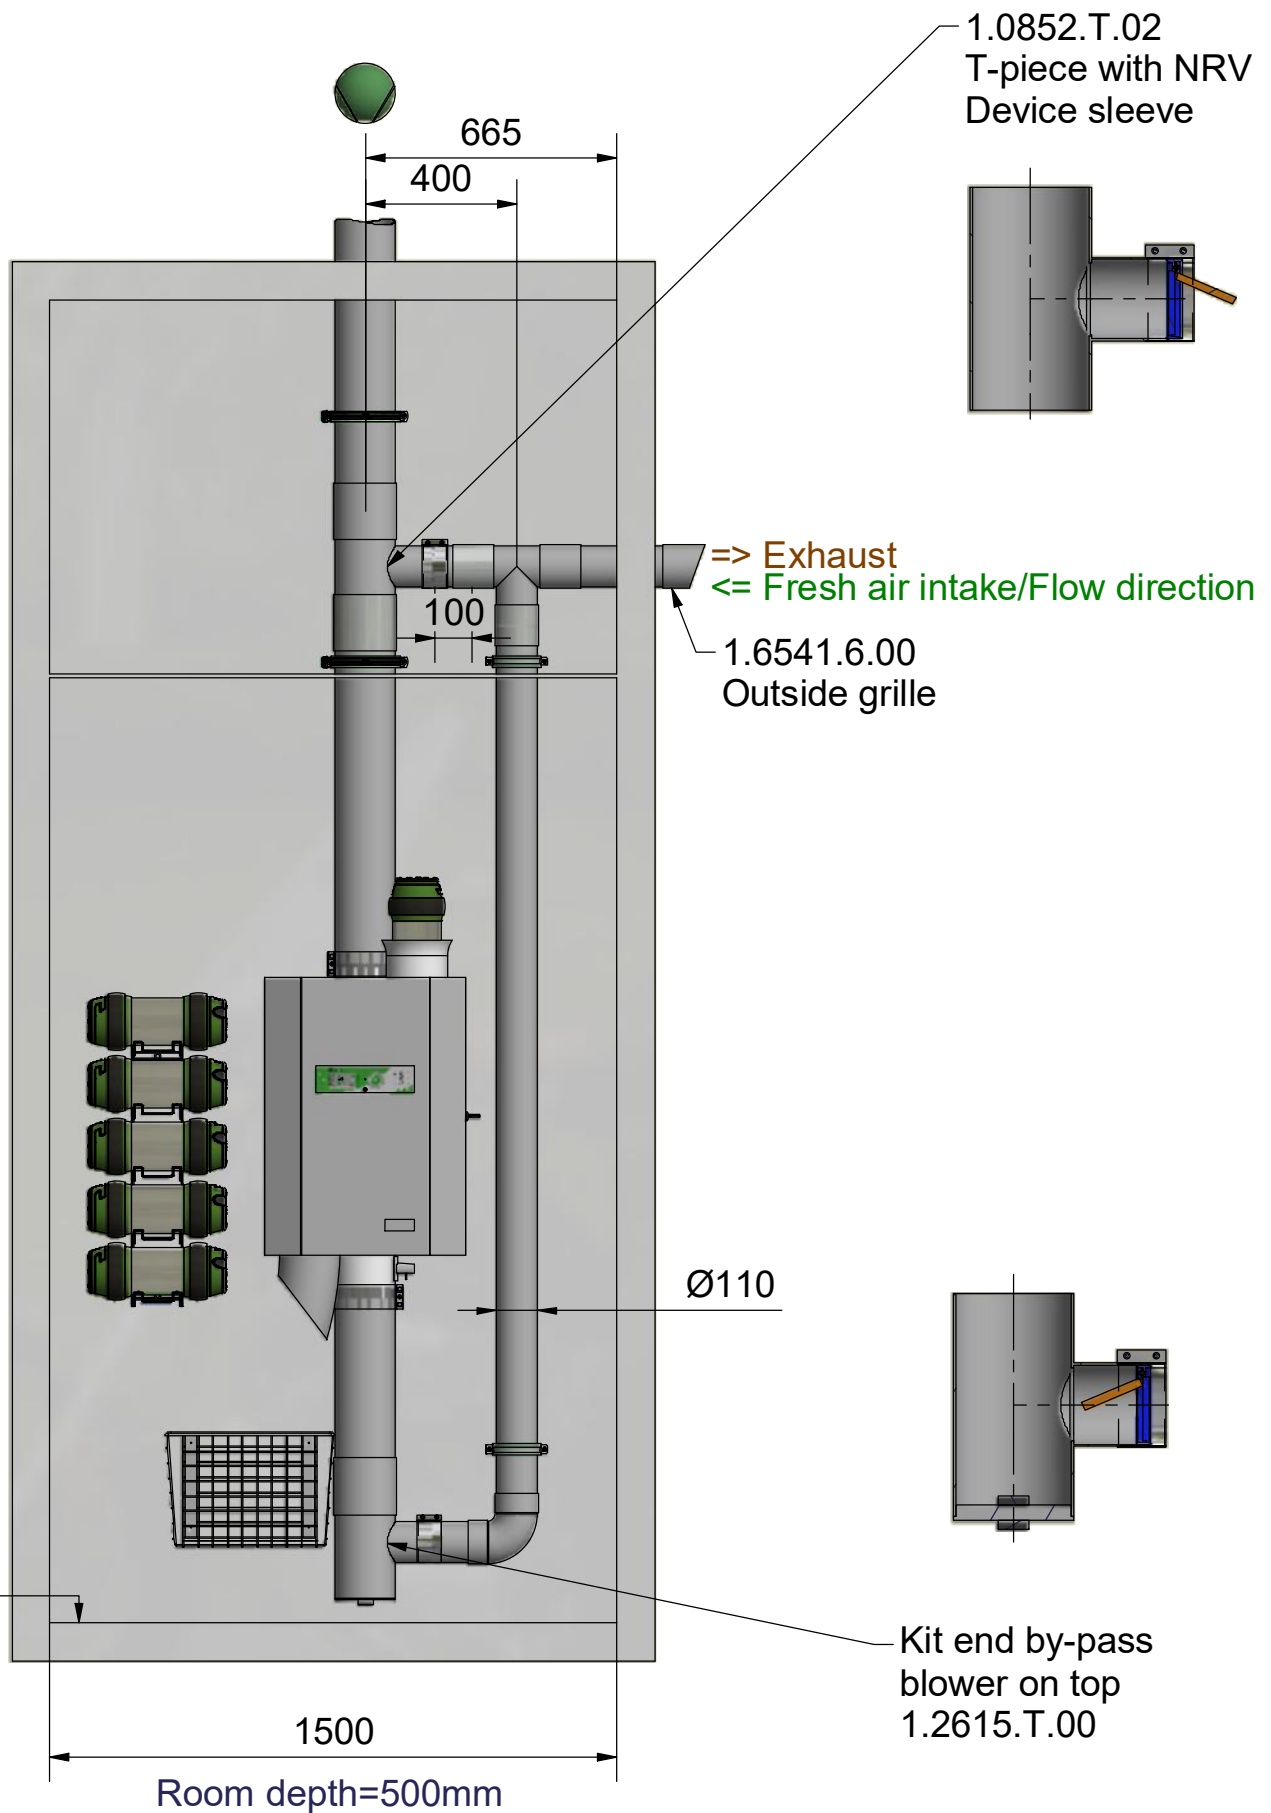

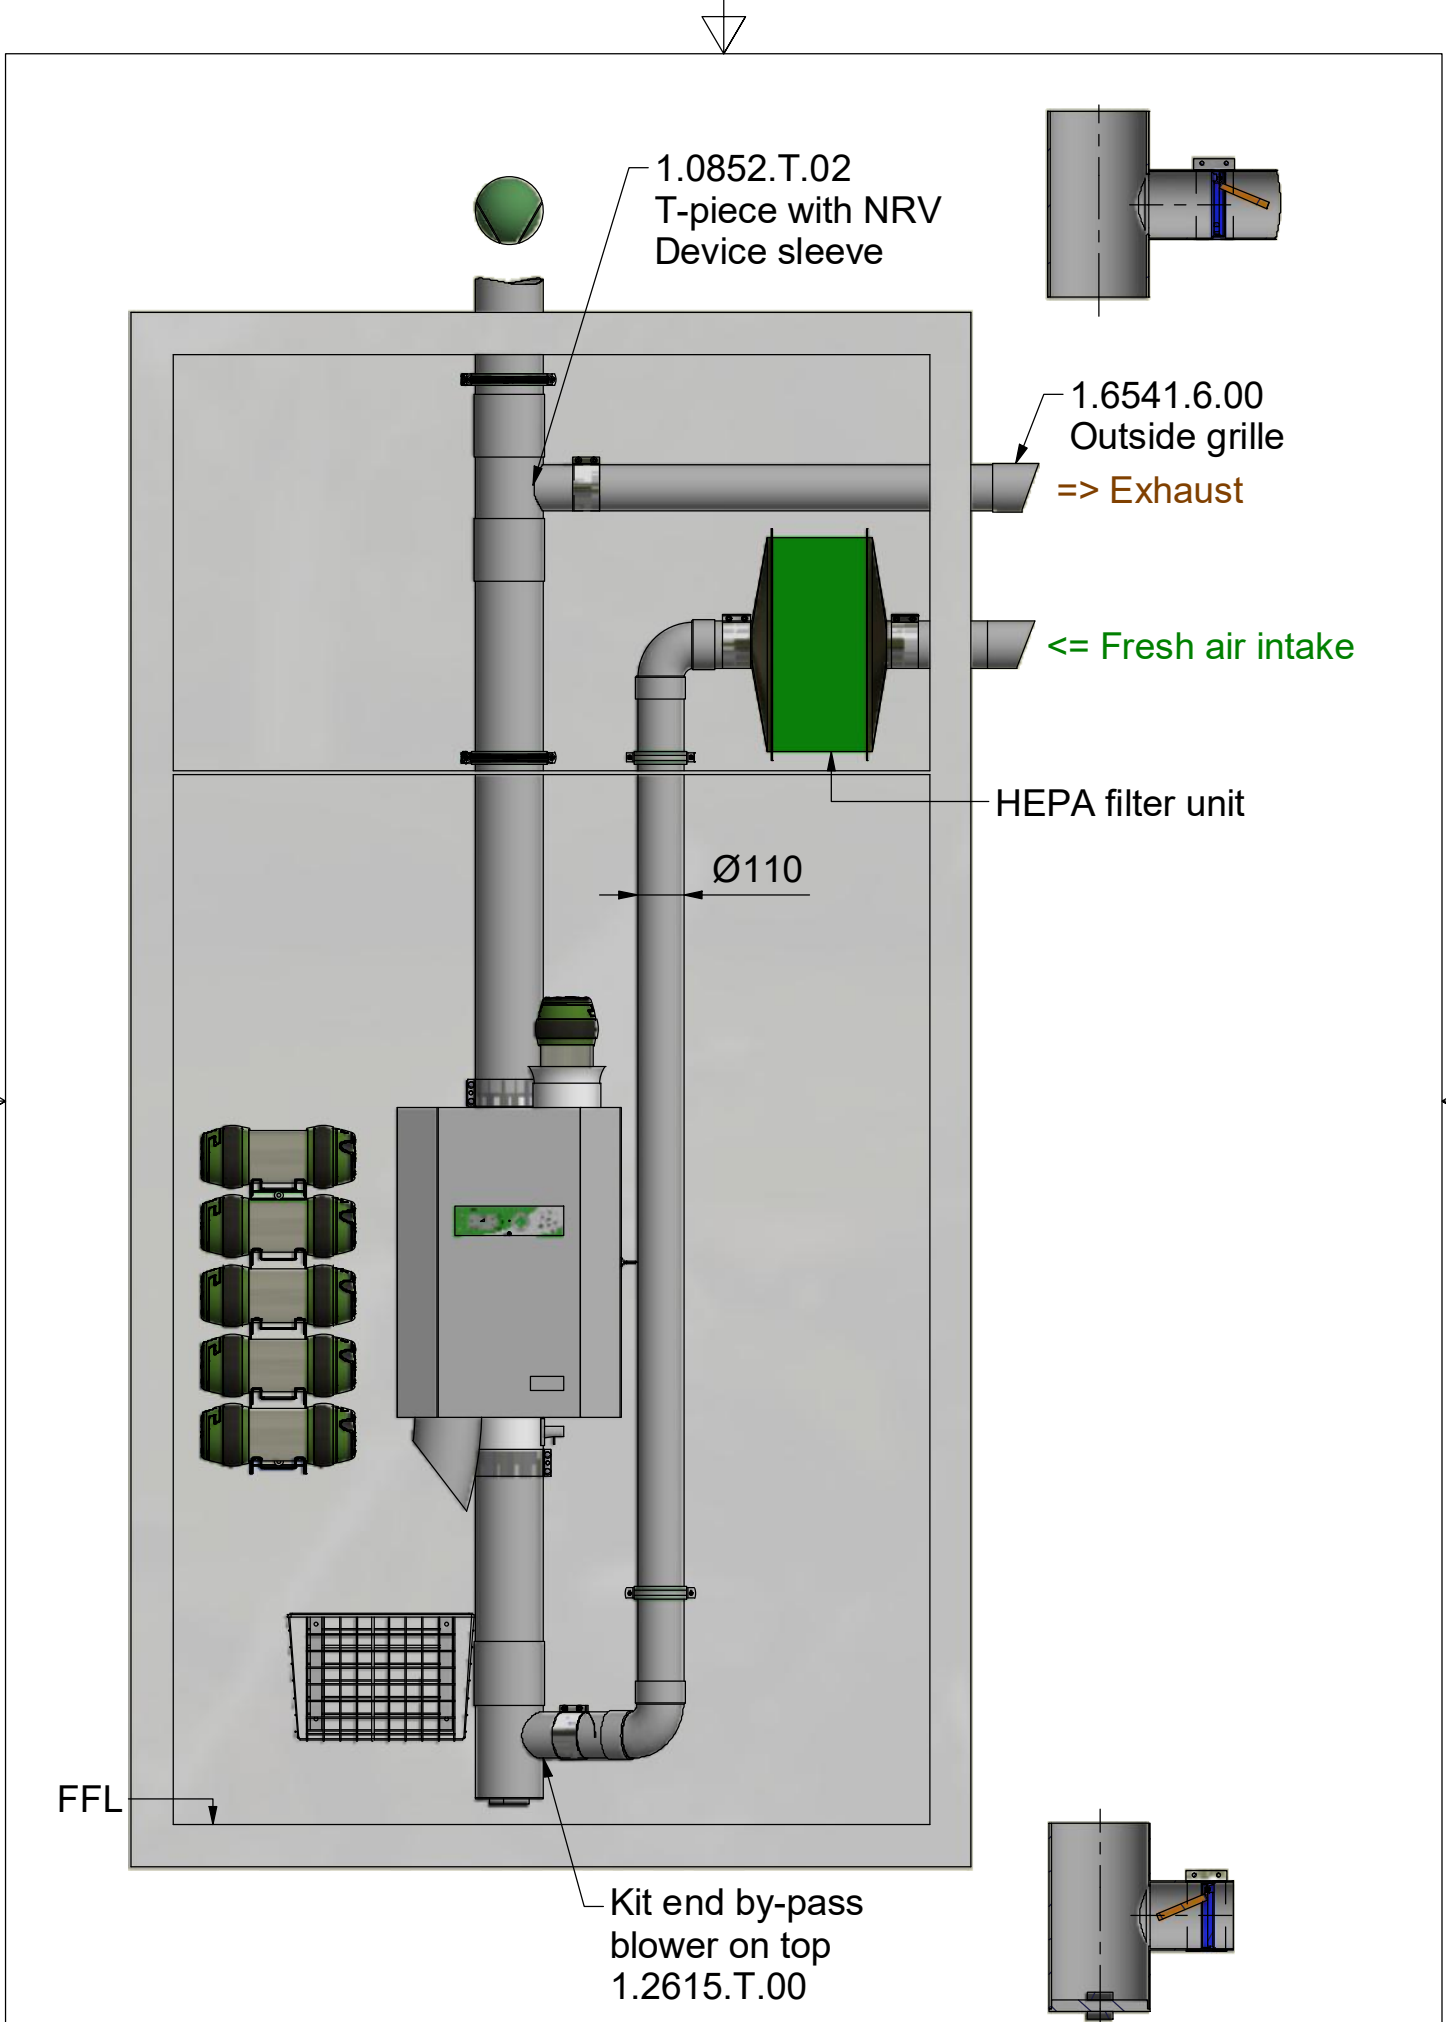

Q-Q

Kit end cover
1.0949.T.00

365

Q

500

=> Exhaust
<= Fresh air intake

1.6541.6.00
Outside grille

1.0852.T.00
T-piece 160/160/110

122

980

FFL

Q

500

1200

